



**Security level: Class D-I according to EN 1143-2**

Drawer in front with key lock, with slot prepared for cylindrical lock.

Max. deposit dimensions:  
H\*W\*D 290\*400\*20 mm,  
H\*W\*T 220\*400\*50 mm,  
H\*W\*T 90\*400\*80 mm.

Suitable for the storage of:  
 office documents, office equipment  
 valuables

**Description**

Flensburg series - drawer deposit safes.

**Body:** multi-walled body (62 mm thick)  
**Door:** multi-walled door construction (104 mm thick)  
**Locking:** 4-way locking bolt system


**Standard option**

**Lock:** safe and the drawer, each equipped with high security key lock I class VdS with two keys  
**Boltwork handle:** main door with the handle protruding 60 mm, the drawer equipped with the grip  
**Hinges:** external  
**Door opening angle:** 180°  
**Mounting holes:** 1 hole in the floor  
**Colour:** RAL 7035 (light grey)



Art. No.	Model	Outer dimensions*			Inner dimensions			Door light		Anchoring		Weight Kg	Shelves Number	Volume Liters
		Height mm	Width mm	Depth mm	Height mm	Width mm	Depth mm	Height mm	Width mm	Bottom number	Backwall number			
36200	Flensburg	800	650	550	269	514	380	436	496	1	-	300	1	53
36201	Flensburg	1000	650	550	469	514	380	636	496	1	-	300	1	92
36202	Flensburg	1200	650	550	669	514	380	836	496	1	-	300	1	131
36203	Flensburg	1400	650	550	869	514	380	1036	496	1	-	300	1	170

\* excluding hinges, handles and fittings



**Closure options**


Standard option



Options available against surcharge



**Accessories available against surcharge**

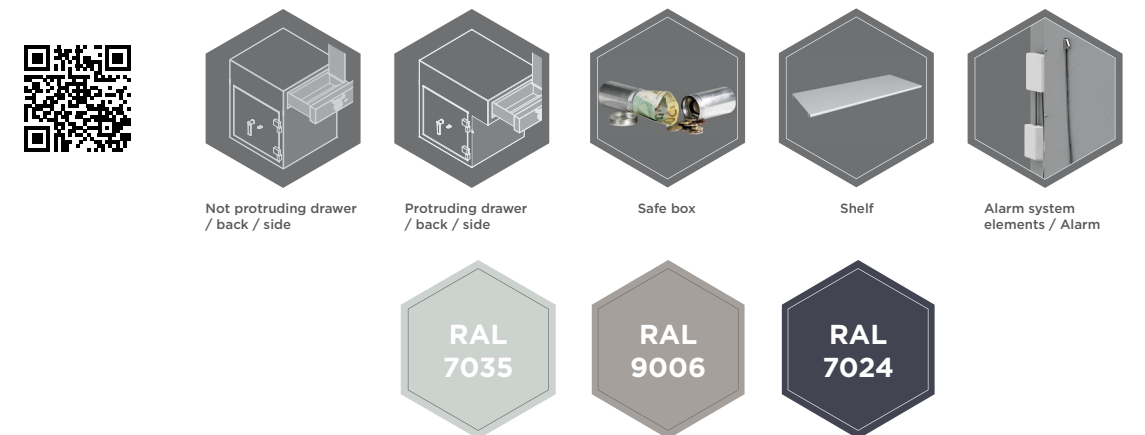

All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.

The picture shows an example of a safe for deposit - model St. Gallen Deposit Art. No. 36261.00 with additional equipment.



Art. 36200

