



HINGES WITH DECORATIVE ALUMINIUM PLUGS

VESTA HANDLE AS STANDARD





NEW BOLTWORK AND BOLTS

LFS30

Acc. to
EN 15659:2019 (E)
norm

Security level: Class IV according to EN 1143-1:2019
Fire rating: Fire-protected safes according to EN 15659:2019, LFS 30

Suitable for the storage of:

-  office documents, office equipment
-  valuables

Description

Series **save4ever IV** - safes with ECB•S certificate for storage of valuables.
Double protective mechanism: additional glass plate, which triggers bolting protection against the burglary attempt.

Body: multi-walled body

Door: multi-walled door construction

Locking: 4-way locking bolt system - incl. overlapping profile on the hinge side

Standard option

Lock: 2 high security key locks II class VdS II/IMP - class B (each lock with 2 keys)

Boltwork handle: handle protruding 79 mm

Hinges: External

Door opening angle: 180°

Mounting holes: 1 hole in the bottom, 1 blind hole in the back wall up to 1/3 height (assembly set for 1 hole as standard)

Additional equipment: each model prepared for alarm installation

Paint: RAL 7024, RAL 7035

save4ever IV





key lock



425100.11 / 425100.01

Outer dimensions HxWxD (mm)	625 x 500 x 500
Inner dimensions HxWxD (mm)	505 x 370 x 305
Weight	306 kg
Files number (pcs.):	6
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.) *	5
Volume (l.)	57



425101.11 / 425101.01

Outer dimensions HxWxD (mm)	625 x 570 x 500
Inner dimensions HxWxD (mm)	505 x 440 x 305
Weight	349 kg
Files number (pcs.):	6
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.) *	5
Volume (l.)	64



425102.11 / 425102.01

Outer dimensions HxWxD (mm)	720 x 570 x 500
Inner dimensions HxWxD (mm)	600 x 440 x 305
Weight	371 kg
Files number (pcs.):	8
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.) *	5
Volume (l.)	81

Double key locks (each with 2 keys)
RAL 7024 / RAL 7035



425103.11 / 425103.01

Outer dimensions HxWxD (mm)	870 x 570 x 500
Inner dimensions HxWxD (mm)	750 x 440 x 305
Weight	436 kg
Files number (pcs.):	10
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.) *	5
Volume (l.)	101



425104.11 / 425104.01

Outer dimensions HxWxD (mm)	1070 x 570 x 500
Inner dimensions HxWxD (mm)	950 x 440 x 305
Weight	523 kg
Files number (pcs.):	13
Shelves number (pcs.):	2
Hooks on the hook bar (pcs.) *	5
Volume (l.)	127



key lock



425105.11 / 425105.01

Outer dimensions HxWxD (mm)	1220 x 570 x 500
Inner dimensions HxWxD (mm)	1100 x 440 x 305
Weight	589 kg
Files number (pcs.):	15
Shelves number (pcs.):	2
Hooks on the hook bar (pcs.) *	5
Volume (l.)	148



425106.11 / 425106.01

Outer dimensions HxWxD (mm)	1370 x 570 x 500
Inner dimensions HxWxD (mm)	1250 x 440 x 305
Weight	654 kg
Files number (pcs.):	17
Shelves number (pcs.):	3
Hooks on the hook bar (pcs.) *	5
Volume (l.)	168



425107.11 / 425107.01

Outer dimensions HxWxD (mm)	770 x 700 x 540
Inner dimensions HxWxD (mm)	650 x 570 x 345
Weight	476 kg
Files number (pcs.):	11
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.) *	5
Volume (l.)	128

Double key locks (each with 2 keys)
RAL 7024 / RAL 7035



425108.11 / 425108.01

Outer dimensions HxWxD (mm)	1220 x 700 x 540
Inner dimensions HxWxD (mm)	1100 x 570 x 345
Weight	706 kg
Files number (pcs.):	21
Shelves number (pcs.):	2
Hooks on the hook bar (pcs.) *	5
Volume (l.)	216



425109.11 / 425109.01

Outer dimensions HxWxD (mm)	1470 x 700 x 540
Inner dimensions HxWxD (mm)	1350 x 570 x 345
Weight	834 kg
Files number (pcs.):	25
Shelves number (pcs.):	3
Hooks on the hook bar (pcs.) *	5
Volume (l.)	265



key lock



425110.11 / 425110.01

Outer dimensions HxWxD (mm)	1476 x 806 x 540
Inner dimensions HxWxD (mm)	1356 x 676 x 345
Weight	920 kg
Files number (pcs.):	35
Shelves number (pcs.):	3
Hooks on the hook bar (pcs.) *	5
Volume (l.)	316



425111.11 / 425111.01

Outer dimensions HxWxD (mm)	1776 x 806 x 540
Inner dimensions HxWxD (mm)	1656 x 676 x 345
Weight	1087 kg
Files number (pcs.):	42
Shelves number (pcs.):	4
Hooks on the hook bar (pcs.) *	5
Volume (l.)	386



425112.11 / 425112.01

Outer dimensions HxWxD (mm)	1226 x 836 x 690
Inner dimensions HxWxD (mm)	1106 x 706 x 495
Weight	927 kg
Files number (pcs.):	27
Shelves number (pcs.):	2
Hooks on the hook bar (pcs.) *	5
Volume (l.)	387

Double key locks (each with 2 keys)
RAL 7024 / RAL 7035



425113.11 / 425113.01

Outer dimensions HxWxD (mm)	1476 x 836 x 690
Inner dimensions HxWxD (mm)	1356 x 706 x 495
Weight	1088 kg
Files number (pcs.):	35
Shelves number (pcs.):	3
Hooks on the hook bar (pcs.) *	5
Volume (l.)	474




425114.11 / 425114.01

Outer dimensions HxWxD (mm)	1776 x 836 x 690
Inner dimensions HxWxD (mm)	1656 x 706 x 495
Weight	1281 kg
Files number (pcs.):	35
Shelves number (pcs.):	4
Hooks on the hook bar (pcs.) *	5
Volume (l.)	579

* hook strip for self assembly

**** available options of changing the lock**

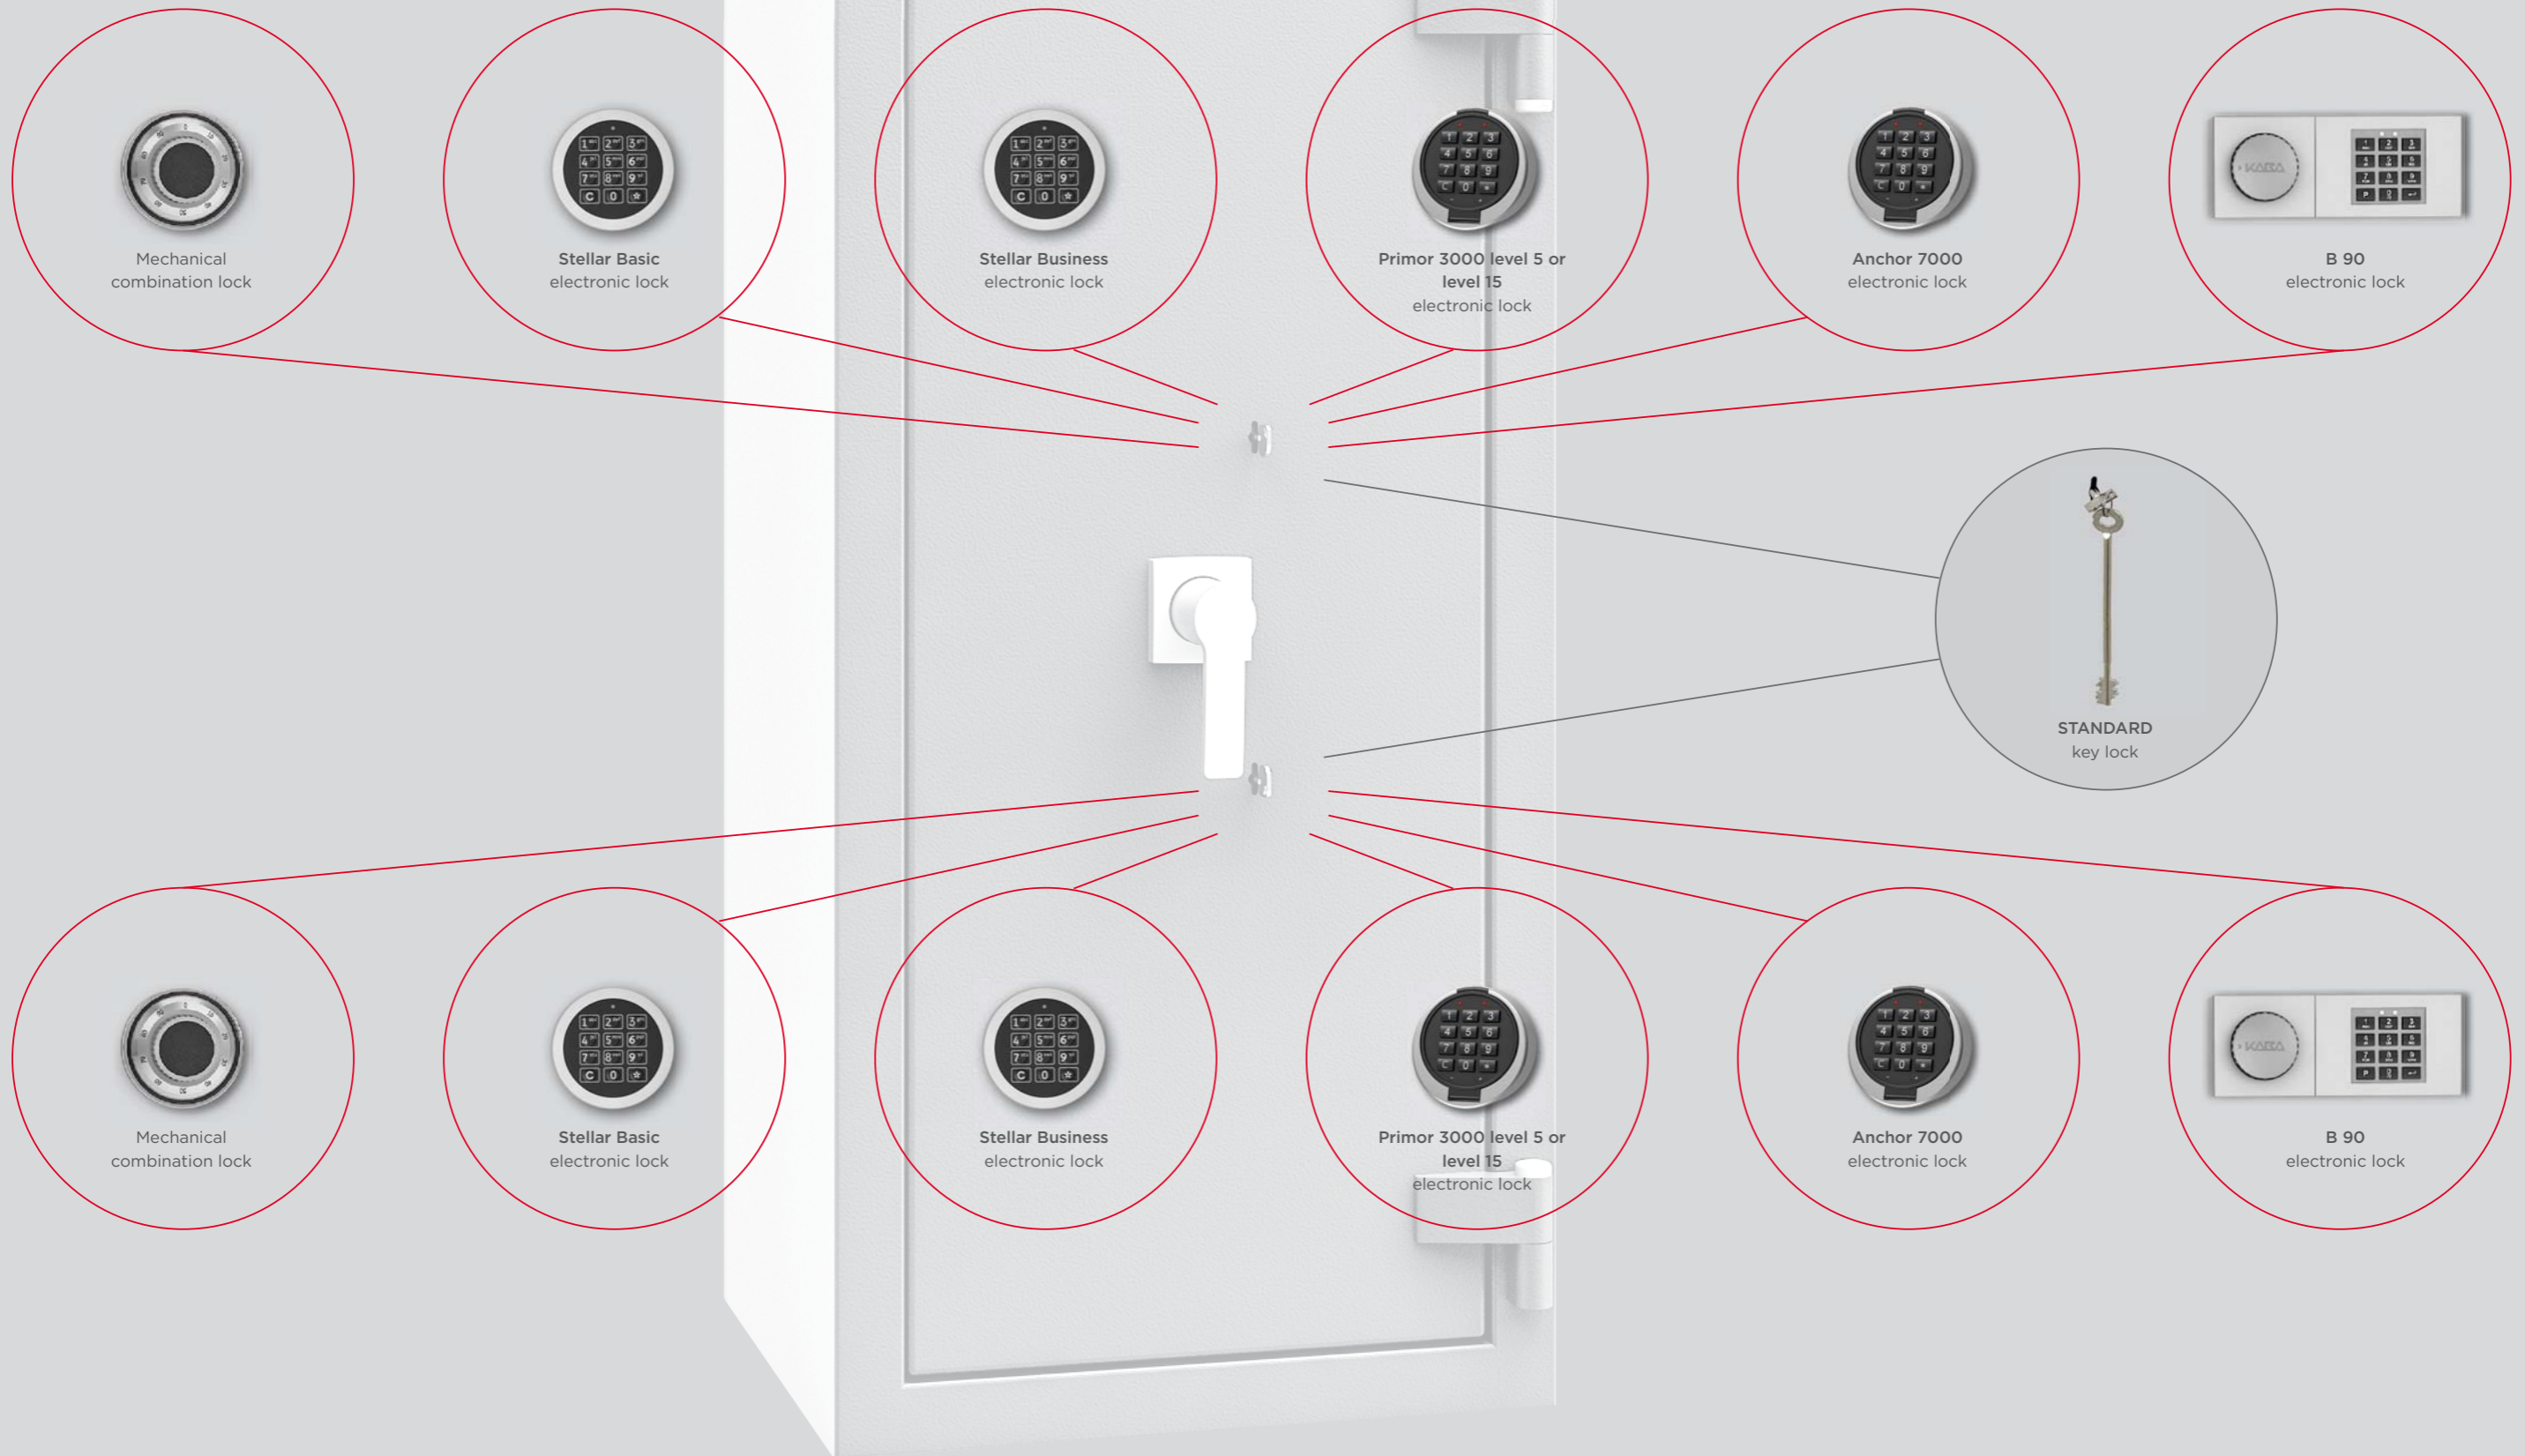

Possible lock configurations



Mechanical combination lock

Key lock



Stellar Basic - electronic lock

Key lock



Stellar Business - electronic lock

Key lock



Primor 3000 level 5 or level 15 - electronic lock

Key lock



Anchor 7000 - electronic lock

Key lock




B 90 - electronic lock

Key lock




Mechanical combination lock

Mechanical combination lock

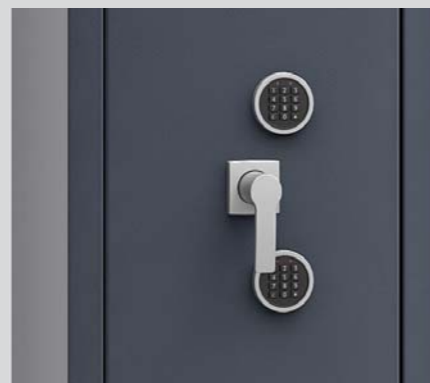

Stellar Basic - electronic lock

Stellar Basic - electronic lock

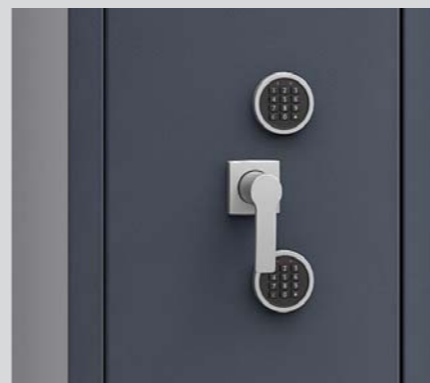

Stellar Business - electronic lock

Stellar Business - electronic lock




Primor 3000 level 5 or level 15 - electronic lock

Primor 3000 level 5 or level 15 - electronic lock



Anchor 7000 - electronic lock

Anchor 7000 - electronic lock

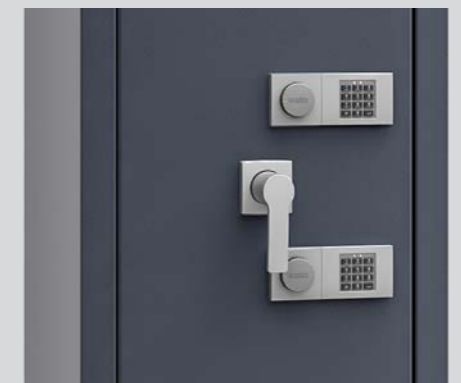

B 90 - electronic lock

B 90 - electronic lock



Preparation for alarm system

save4ever IV series has standard holes that enable the installation of alarm system components.




Alarm system (EMA)

- complete set (also available in single positions).

When installing the alarm system or single components, the safe is equipped with the bottom cover, which diminishes the safe space inside by 30 mm.

* due to the inner dimensions of the safes, the full alarm installation is available from model 425103.00. In models 425100.00 - 425102.00 - the alarm elements are on request.

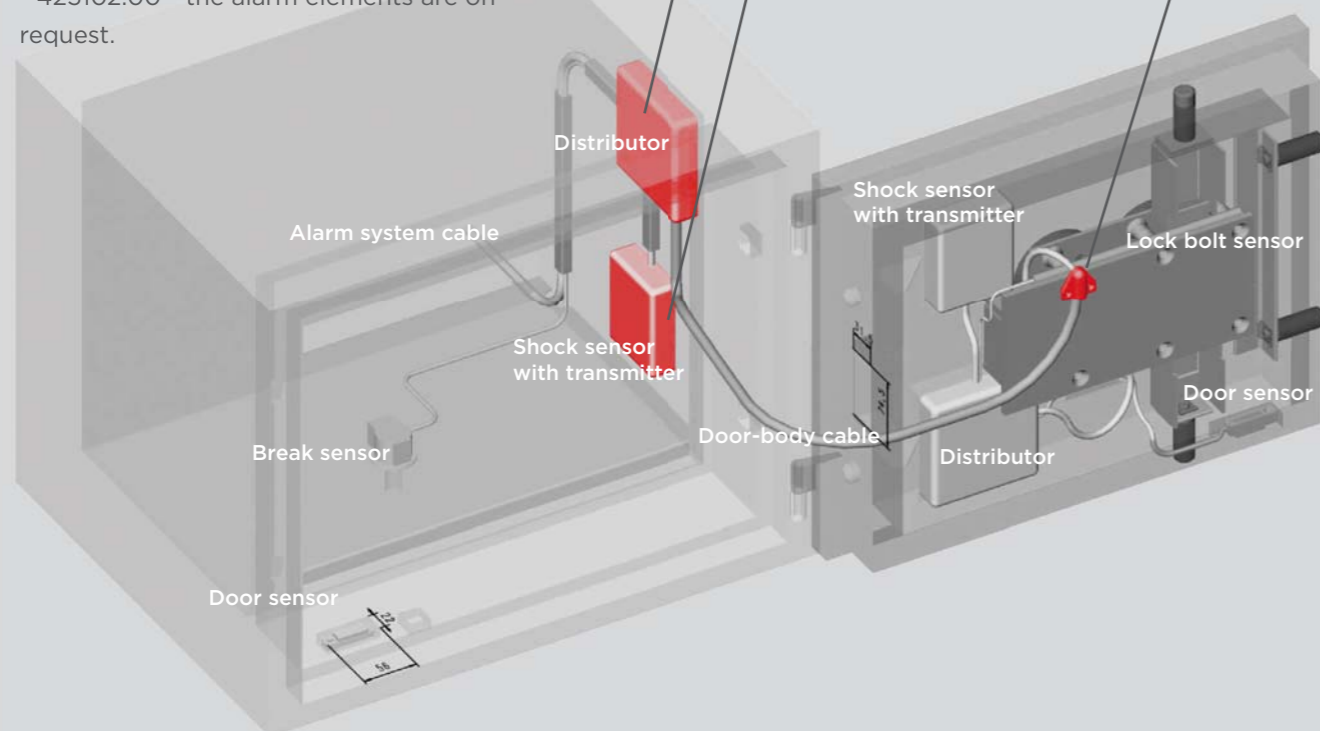

Fire resistance of class IV safes

The real and functional fire resistance of safes is one that is confirmed by **certificates and appropriate tests**.

Fire resistance is the ability of safes to meet certain requirements during a fire.

The measure of the fire resistance of safes is the time expressed in minutes, in a simplified way illustrating how long a given safe can protect its contents from extremely severe conditions during a fire and fire action.

The light fire resistance defined by the LFS 30 class provides the stored property with short-term fire protection of 30 minutes.

Norm EN 15659:2019 implies heating the safe together with furnace according to temperature curve up to 840°C, and measuring the temperature in critical parts of the safe inside when it is heated up.

Certification label permanently fixed to the safe is a **guarantee for properly conducted test in specialized certification institutes**.



Acc. to
EN 15659:2019 (E)
norm



Fire seal

Foam seal