



HINGES WITH DECORATIVE  
ALUMINIUM PLUGS

VESTA DOOR HANDLE  
AND ROSETTES  
IN THE STANDARD





NEW BOLTWORK  
AND BOLTS



According to  
EN 15659:2019  
norm

**Security level: Class VI according to EN 1143-1:2019**  
**Fire rating: Fire-protected safes according to EN 15659:2019 LFS 30 P**

Suitable for the storage of

-  valuables
-  documents

#### Description

Series **save4ever VI** - safes with ECB•S certificate for storage of valuables.

Double protective mechanism: additional glass plate, which triggers bolting protection against the burglary attempt.

**Body:** multi-walled body

**Door:** multi-walled door construction with stainless steel handle for easy door opening

**Locking:** 2-way locking bolt system - incl. overlapping profile on the hinge side.

#### Standard option

**Lock:** 2 high security key locks III class VdS III - class C (each lock with 2 keys)

**Boltwork handle:** handle, protruding 79 mm

**Hinges:** external

**Door opening angle:** 180°

**Mounting holes:** 1 hole in the bottom, 1 blind hole in the back wall up to 1/3 height (assembly set for 1 hole as standard)

**Additional equipment:** each model prepared for alarm installation

**Colour:** RAL 9005, RAL 7035

# save4ever VI





key lock



**428100.21 / 428100.01**

**428101.21 / 428101.01**

**428102.21 / 428102.01**

|                                |                                     |                 |                 |
|--------------------------------|-------------------------------------|-----------------|-----------------|
| Outer dimensions HxWxD (mm)    | 790 x 660 x 620                     | 840 x 690 x 620 | 990 x 690 x 620 |
| Inner dimensions HxWxD (mm)    | 550 x 410 x 305                     | 600 x 440 x 305 | 750 x 440 x 305 |
| Weight                         | 740 kg                              | 810 kg          | 930 kg          |
| Shelves number (pcs.):         | 1                                   | 1               | 1               |
| Hooks on the hook bar (pcs.) * | 5                                   | 5               | 5               |
| Volume (l.)                    | 69                                  | 81              | 101             |
| Lock type                      | Double key locks (each with 2 keys) |                 |                 |
| Paint                          | RAL 9005 / RAL 7035                 |                 |                 |

\* hook strip for self assembly



key lock



**428103.21 / 428103.01**

**428104.21 / 428104.01**

**428105.21 / 428105.01**

|                                |                                     |                  |                  |
|--------------------------------|-------------------------------------|------------------|------------------|
| Outer dimensions HxWxD (mm)    | 1190 x 690 x 620                    | 1340 x 690 x 620 | 1490 x 690 x 620 |
| Inner dimensions HxWxD (mm)    | 950 x 440 x 305                     | 1100 x 440 x 305 | 1250 x 440 x 305 |
| Weight                         | 1090 kg                             | 1220 kg          | 1340 kg          |
| Shelves number (pcs.):         | 2                                   | 2                | 3                |
| Hooks on the hook bar (pcs.) * | 5                                   | 5                | 5                |
| Volume (l.)                    | 127                                 | 148              | 168              |
| Lock type                      | Double key locks (each with 2 keys) |                  |                  |
| Paint                          | RAL 9005 / RAL 7035                 |                  |                  |

\* hook strip for self assembly

\*\* available options of changing the lock



**810137.00**

OPTION WITHOUT ADDITIONAL CHARGE

Key lock  
class C/III with 2 keys  
(1 standard, 1 detachable)



**810205.01 / 820203.00**

OPTION WITHOUT ADDITIONAL CHARGE

Mechanical combination lock  
ZK 1947 La Gard C  
  
Knob  
ZK LG 2085



**810329.01**

OPTION AGAINST SURCHARGE

Electronic lock -  
Gator 8000 + DF v. 01  
  
2 locks  
1 DF keypad  
Gator Signal Box  
Gator Power Adapter  
Bolt sensor  
Power supply



**810354.01**

OPTION AGAINST SURCHARGE

Electronic lock -  
Paxos Advance set 3+5 v. 01  
  
2 locks  
1 DIAL housing



**810355.01**

OPTION AGAINST SURCHARGE

Electronic lock -  
Twinlock C800 Business LS 2.1 VdS 3  
  
1 x FlatControl Business LS lock keypad  
2 x INSYS Lock 800 LS lock  
1 TwinConnect - central power connection  
1 TwinXT II  
1 12 V power supply 5 m

**Preparation for alarm system**

save4ever VI series has standard holes that enable the installation of alarm system components.




**Alarm system (EMA)**

- complete set (also available in single positions).

When installing the alarm system or single components, the safe is equipped with the bottom cover, which diminishes the safe space inside by 30 mm.

\* due to the inner dimensions of the safes, the full alarm installation is available from model 428101.xx. In model 428100.xx - the alarm elements are on request.

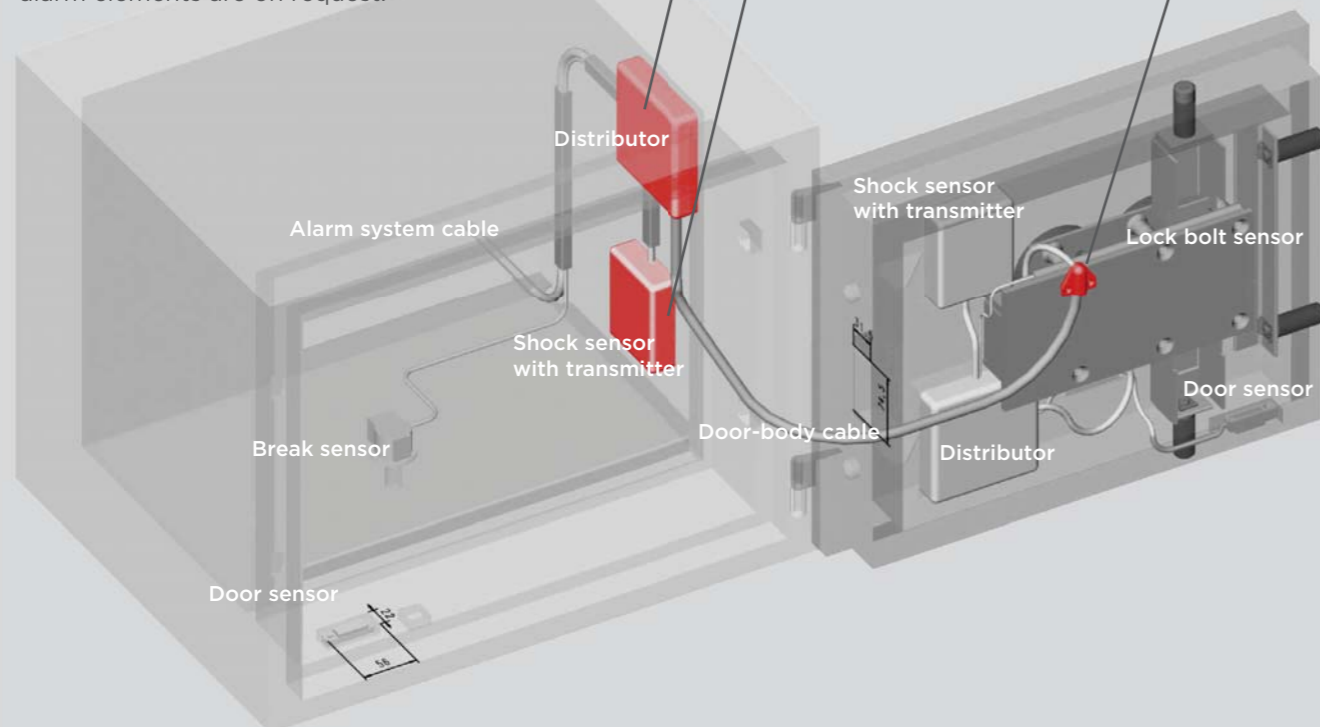

**Fire resistance of class VI safes**

The real and functional fire resistance of safes is one that is confirmed by **certificates and appropriate tests**.

Fire resistance is the ability of safes to meet certain requirements during a fire.

The measure of the fire resistance of safes is the time expressed in minutes, in a simplified way illustrating how long a given safe can protect its contents from extremely severe conditions during a fire and fire action.

The light fire resistance defined by the LFS 30 class provides the stored property with short-term fire protection of 30 minutes.

Norm EN 15659:2019 implies heating the safe together with furnace according to temperature curve up to 840°C, and measuring the temperature in critical parts of the safe inside when it is heated up.

Certification label permanently fixed to the safe is a **guarantee for properly conducted test in specialized certification institutes**.



Acc. to  
**EN 15659:2019**  
norm



Fire seal

Foam seal