



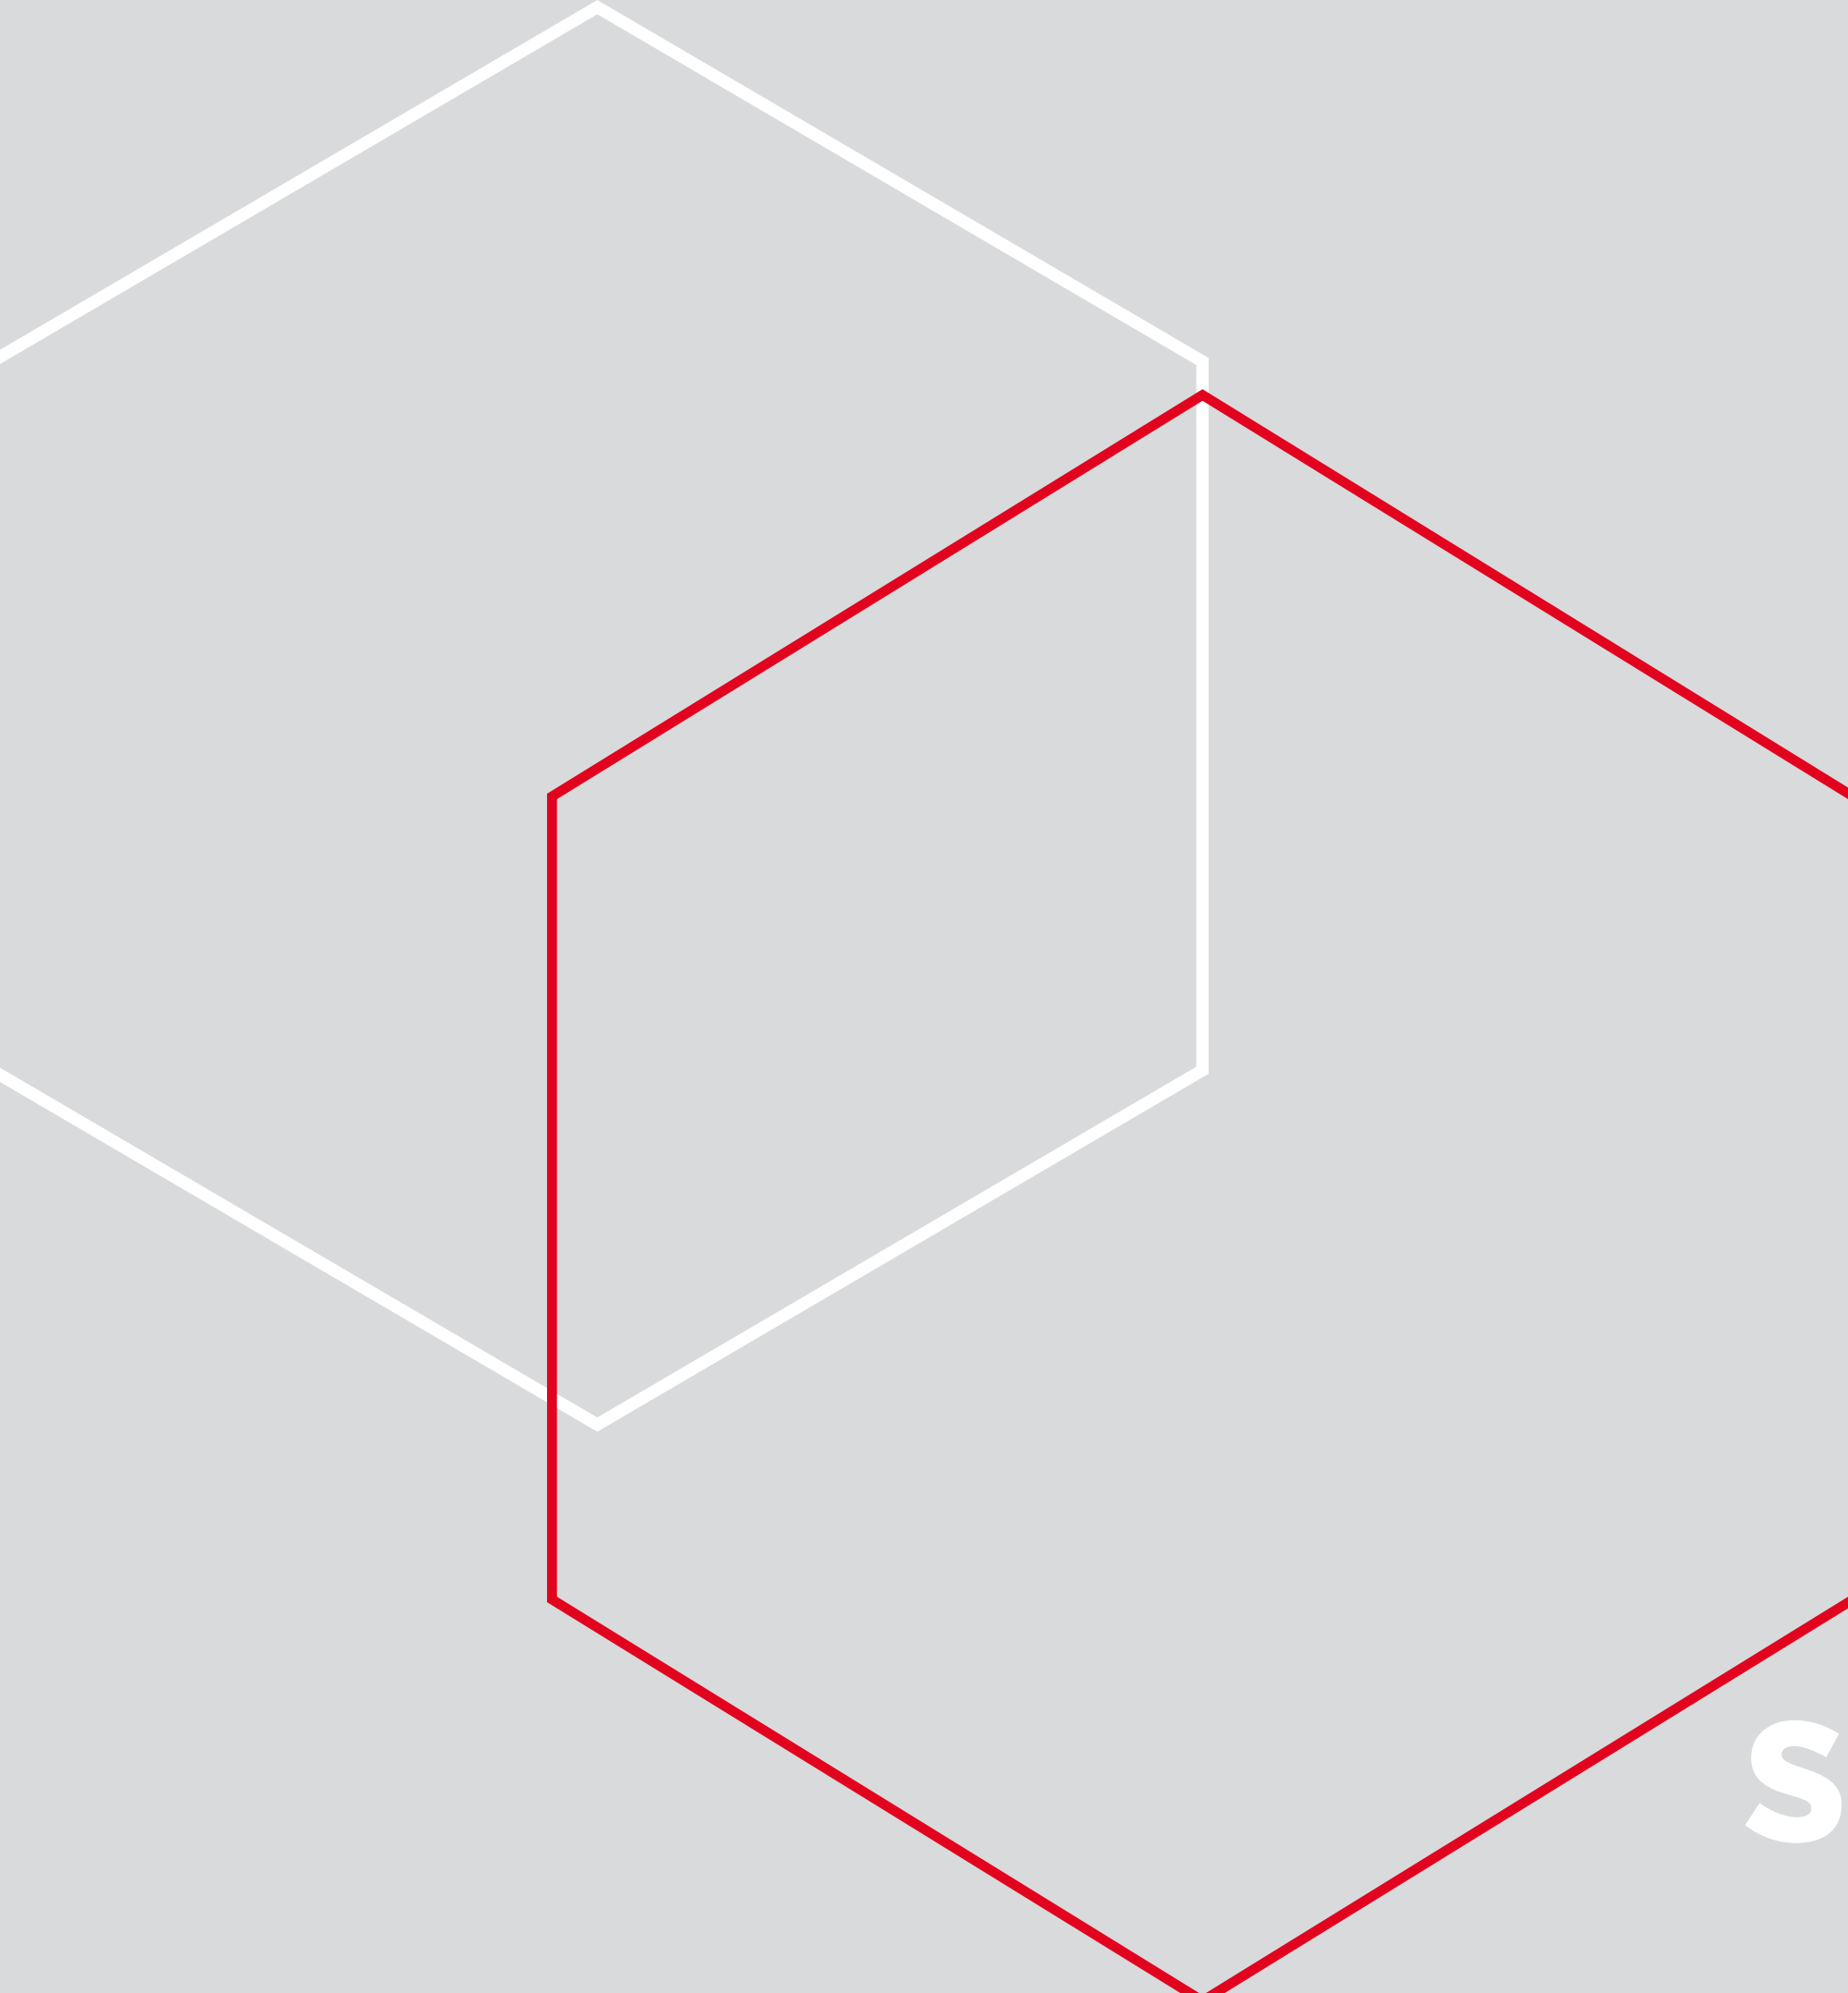

save4ever

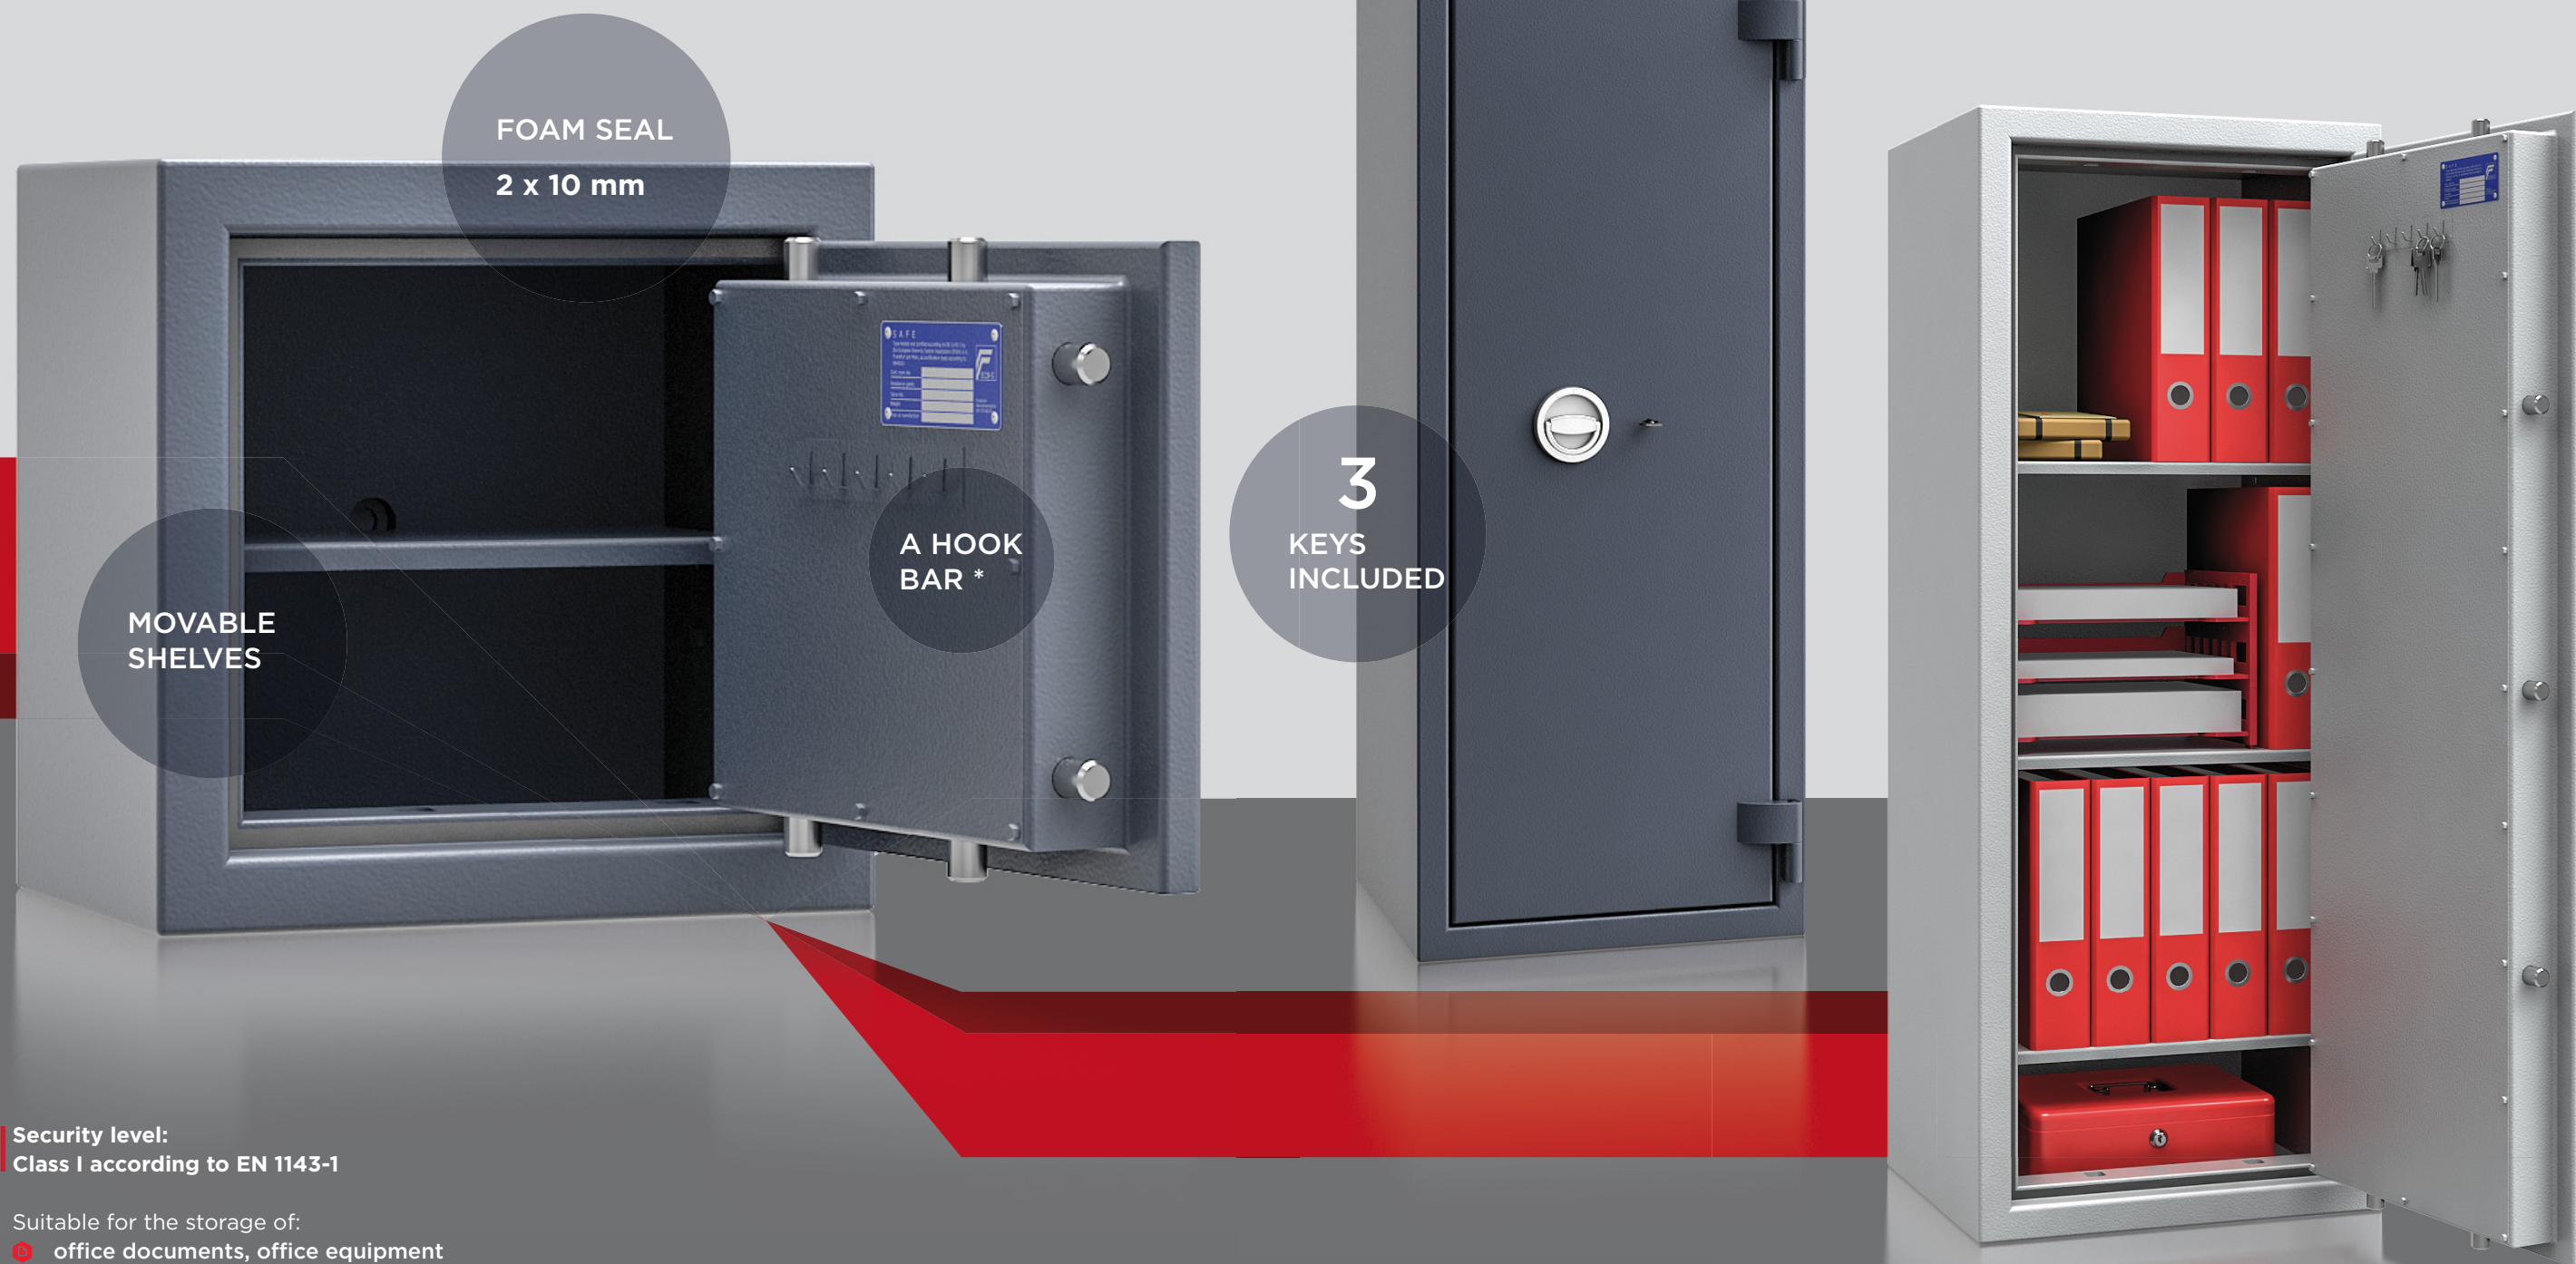

FOAM SEAL
2 x 10 mm

MOVABLE
SHELVES

A HOOK
BAR *

3
KEYS
INCLUDED

Security level:
Class I according to EN 1143-1

Suitable for the storage of:

- office documents, office equipment
- valuables

Description

save4ever I series - high security safe - ECB•S certification.

Body: multi-walled body (25 mm thick)

Door: multi-walled door construction (74 mm thick)

Locking: 4-way locking bolt system - incl. overlapping profile on the hinge side

Standard option

Lock: high security key lock I class VdS with three keys (95 mm) or electronic lock II class VdS

Boltwork handle: handle, protruding 12 mm

Hinges: external

Door opening angle: 180°

Mounting holes: 1 hole in the floor, 1 on the backwall (not drilled) up to 1/3 height

save4ever I



key lock



402000.11 / 402000.01

Outer dimensions HxWxD (mm)	400 x 400 x 270
Inner dimensions HxWxD (mm)	350 x 341 x 157
Weight	39 kg
Files number (pcs.):	1
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.)	5
Volume (l.)	18



402001.11 / 402001.01

Outer dimensions HxWxD (mm)	400 x 420 x 420
Inner dimensions HxWxD (mm)	350 x 361 x 307
Weight	55 kg
Files number (pcs.):	4
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.)	5
Volume (l.)	39



402002.11 / 402002.01

Outer dimensions HxWxD (mm)	500 x 500 x 420
Inner dimensions HxWxD (mm)	450 x 441 x 307
Weight	71 kg
Files number (pcs.):	7
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.)	5
Volume (l.)	60



402003.11 / 402003.01

Outer dimensions HxWxD (mm)	650 x 500 x 420
Inner dimensions HxWxD (mm)	600 x 441 x 307
Weight	85 kg
Files number (pcs.):	9
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.)	5
Volume (l.)	81
Lock type	key lock (3 keys included)
Paint	RAL 7024

* hook strip for self assembly



key lock



402004.11 / 402004.01

Outer dimensions HxWxD (mm)	800 x 500 x 420
Inner dimensions HxWxD (mm)	750 x 441 x 307
Weight	100 kg
Files number (pcs.):	12
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.)	5
Volume (l.)	101



402005.11 / 402005.01

Outer dimensions HxWxD (mm)	1000 x 500 x 420
Inner dimensions HxWxD (mm)	950 x 441 x 307
Weight	120 kg
Files number (pcs.):	15
Shelves number (pcs.):	2
Hooks on the hook bar (pcs.)	5
Volume (l.)	127



402006.11 / 402006.11

Outer dimensions HxWxD (mm)	1150 x 500 x 420
Inner dimensions HxWxD (mm)	1100 x 441 x 307
Weight	135 kg
Files number (pcs.):	18
Shelves number (pcs.):	2
Hooks on the hook bar (pcs.)	5
Volume (l.)	148



402007.11 / 402007.01

Outer dimensions HxWxD (mm)	1300 x 500 x 420
Inner dimensions HxWxD (mm)	1250 x 441 x 307
Weight	150 kg
Files number (pcs.):	20
Shelves number (pcs.):	3
Hooks on the hook bar (pcs.)	5
Volume (l.)	169
Lock type	key lock (3 keys included)
Paint	RAL 7024

* hook strip for self assembly

**** changes in inner equipment, locks or dimensions - please contact us**



Electronic lock -
Solar Basic



402000.12 / 402000.02

Outer dimensions HxWxD (mm)
Inner dimensions HxWxD (mm)
Weight
Files number (pcs.):
Shelves number (pcs.):
Hooks on the hook bar (pcs.)
Volume (l.)

400 x 400 x 270
350 x 341 x 157
39 kg
1
1
5
18



402001.12 / 402001.02

400 x 420 x 420
350 x 361 x 307
55 kg
4
1
5
39



402002.12 / 402002.02

500 x 500 x 420
450 x 441 x 307
71 kg
7
1
5
60



402003.12 / 402003.02

650 x 500 x 420
600 x 441 x 307
85 kg
9
1
5
81

Electronic lock - Solar Basic
RAL 7024



Electronic lock -
Solar Basic



402004.12 / 402004.02

Outer dimensions HxWxD (mm)
Inner dimensions HxWxD (mm)
Weight
Files number (pcs.):
Shelves number (pcs.):
Hooks on the hook bar (pcs.)
Volume (l.)

800 x 500 x 420
750 x 441 x 307
100 kg
12
1
5
101



402005.12 / 402005.02

1000 x 500 x 420
950 x 441 x 307
120 kg
15
2
5
127



402006.12 / 402006.12

1150 x 500 x 420
1100 x 441 x 307
135 kg
18
2
5
148



402007.12 / 402007.02

1300 x 500 x 420
1250 x 441 x 307
150 kg
20
3
5
169

Electronic lock - Solar Basic
RAL 7024

**** changes in inner equipment, locks or dimensions - please contact us**



Mechanical code lock



Electronic lock -
Solar Business



Electronic lock -
Primor 3000 level 5



Electronic lock -
Primor 3000 level 15



Electronic lock - B 30

Accessories available against surcharge

402000.01	/	402000.11
402000.02	/	402000.12
402001.01	/	402001.11
402001.02	/	402001.12
402002.01	/	402002.11
402002.02	/	402002.12
402003.01	/	402003.11
402003.02	/	402003.12
402004.01	/	402004.11
402004.02	/	402004.12
402005.01	/	402005.11
402005.02	/	402005.12
402006.01	/	402006.11
402006.02	/	402006.12
402007.01	/	402007.11
402007.02	/	402007.12

☒
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐

☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒

☒
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐

☒
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐

☐
☐
☐
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐
☒
☐

**** changes in inner equipment, locks or dimensions - please contact us**



All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.

INTER SICHERHEITS SERVICE Sp. z o.o.

T +48 95 723 97 77 - 80

F +48 95 723 97 82


E biuro@iss.net.pl

66-400 Gorzów Wlkp.

ul. Kobylągórska 2

www.iss.net.pl

Model
save4ever I

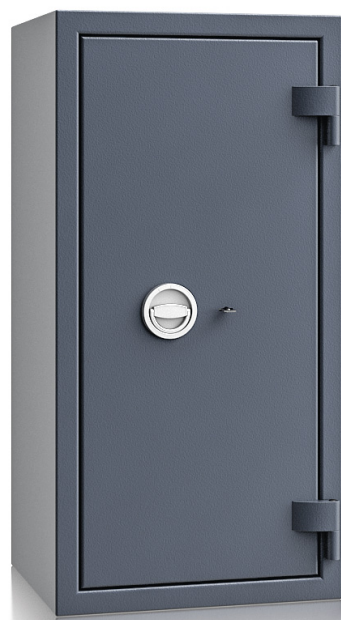

Security level: Class I according to EN 1143-1

Suitable for the storage of:

- documents
- valuables

Description

Series **save4ever I** - high security safe - ECB•S certification.

Body: double-walled body (25 mm thick)

Door: multi-walled door construction (84 mm thick)

Locking: 4-way locking bolt system - incl. overlapping profile on the hinge side

Standard option

Lock: high security key lock I class VdS with three keys (95 mm)

Boltwork handle: handle, protruding 12 mm

Hinges: external

Door opening angle: 180°

Mounting holes: 1 hole in the floor, 1 on the backwall (not drilled) up to 1/3 height

Model
save4ever I

Art. No.	Model	Outer dimensions*			Inner dimensions			Door light		Anchoring		Weight	Shelves	Files	Volume	Hooks
		Height mm	Width mm	Depth mm	Height mm	Width mm	Depth mm	Height mm	Width mm	Bottom number	Backwall number	Kg	Number	Number	Liters	Number
402000.00	save4ever	400	400	270	350	341	157	288	304	1	1 **	39	1	1	18	5 ***
402001.00	save4ever	400	420	420	350	361	307	288	324	1	1 **	55	1	4	39	5 ***
402002.00	save4ever	500	500	420	450	441	307	388	404	1	1 **	71	1	7	60	5 ***
402003.00	save4ever	650	500	420	600	441	307	538	404	1	1 **	85	1	9	81	5 ***
402004.00	save4ever	800	500	420	750	441	307	688	404	1	1 **	100	1	12	101	5 ***
402005.00	save4ever	1000	500	420	950	441	307	888	404	1	1 **	120	2	15	127	5 ***
402006.00	save4ever	1150	500	420	1100	441	307	1038	404	1	1 **	135	2	18	148	5 ***
402007.00	save4ever	1300	500	420	1250	441	307	1188	404	1	1 **	150	3	20	168	5 ***

* excluding hinges, handles and fittings

** not drilled

*** hook strip for self assembly




Body: double-walled
body (25 mm thick)



Door: multi-walled door
construction (84 mm thick)

Closure options


Standard option



Key lock



Electronic lock
Solar Basic



Mechanical
code lock



Electronic lock
Solar Business



Electronic lock
Primor 3000 level 5



Electronic lock
Primor 3000 level 15



Electronic lock B 30
(Excl. 402000.00 and
402001.00)

Options available against surcharge



All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.

FOAM SEAL
2 x 10 mm

MOVABLE
SHELVES

A HOOK
BAR *

CLASS
II
according to
EN 1143-1

Security level:
Class II according to EN 1143-1

Suitable for the storage of:

- office documents, office equipment
- valuables

Description

save4ever II series - high security safe - ECB•S certification.

Body: multi-walled body

Door: multi-walled door construction

Locking: 4-way locking bolt system - incl. overlapping profile on the hinge side

Standard option

Lock: high security key lock with two keys or electronic lock

Boltwork handle: handle, protruding 60 mm

Hinges: external

Door opening angle: 180°

Mounting holes: 1 hole in the floor, 1 on the backwall (not drilled) up to 1/3 height

Colour: RAL 7024, RAL 7035

save4ever II





key lock



413100.11 / 413100.01

413101.11 / 413101.01

413102.11 / 413102.01

413103.11 / 413103.01

Outer dimensions HxWxD (mm)	450 x 450 x 465	550 x 550 x 465	700 x 550 x 465	850 x 550 x 465
Inner dimensions HxWxD (mm)	350 x 340 x 305	450 x 440 x 305	600 x 440 x 305	750 x 440 x 305
Weight	109 kg	145 kg	173 kg	201 kg
Files number (pcs.):	4	7	9	12
Shelves number (pcs.):	1	1	1	1
Hooks on the hook bar (pcs.) *	5	5	5	5
Volume (l.)	36	60	81	101

Lock type	Key lock (2 keys included)			
Paint	RAL 7024 / RAL 7035			

* hook strip for self assembly



key lock



413104.11 / 413104.01

413105.11 / 413105.01

413106.11 / 413106.01

Outer dimensions HxWxD (mm)	1050 x 550 x 465	1200 x 550 x 465	1350 x 550 x 465
Inner dimensions HxWxD (mm)	950 x 440 x 305	1100 x 440 x 305	1250 x 440 x 305
Weight	240 kg	268 kg	297 kg
Files number (pcs.):	15	18	20
Shelves number (pcs.):	2	2	3
Hooks on the hook bar (pcs.) *	5	5	5
Volume (l.)	127	148	168

Lock type	Key lock (2 keys included)		
Paint	RAL 7024 / RAL 7035		

* hook strip for self assembly

**** changes in inner equipment, locks or dimensions - please contact us**



Electronic lock -
Solar Basic



413100.12 / 413100.02

413101.12 / 413101.02

413102.12 / 413102.02

413103.12 / 413103.02

Outer dimensions HxWxD (mm)	450 x 450 x 465	550 x 550 x 465	700 x 550 x 465	850 x 550 x 465
Inner dimensions HxWxD (mm)	350 x 340 x 305	450 x 440 x 305	600 x 440 x 305	750 x 440 x 305
Weight	109 kg	145 kg	173 kg	201 kg
Files number (pcs.):	4	7	9	12
Shelves number (pcs.):	1	1	1	1
Hooks on the hook bar (pcs.) *	5	5	5	5
Volume (l.)	36	60	81	101

Electronic lock - Solar Basic

RAL 7024 / RAL 7035

Paint

* hook strip for self assembly



Electronic lock -
Solar Basic



413104.12 / 413104.02

413105.12 / 413105.02

413106.12 / 413106.02

Outer dimensions HxWxD (mm)	1050 x 550 x 465	1200 x 550 x 465	1350 x 550 x 465
Inner dimensions HxWxD (mm)	950 x 440 x 305	1100 x 440 x 305	1250 x 440 x 305
Weight	240 kg	268 kg	297 kg
Files number (pcs.):	15	18	20
Shelves number (pcs.):	2	2	3
Hooks on the hook bar (pcs.) *	5	5	5
Volume (l.)	127	148	168

Electronic lock - Solar Basic

RAL 7024 / RAL 7035

Paint

* hook strip for self assembly

**** changes in inner equipment, locks or dimensions - please contact us**



Mechanical code lock



Electronic lock -
Solar Business



Electronic lock -
Primor 3000 level 5



Electronic lock -
Primor 3000 level 15



Electronic lock - B 30

Accessories available against surcharge

413100.01	/	413100.11	☒	☐	☒	☒	☐
413100.02	/	413100.12	☐	☒	☐	☐	☐
413101.01	/	413101.11	☒	☐	☒	☒	☒
413101.02	/	413101.12	☐	☒	☐	☐	☐
413102.01	/	413102.11	☒	☐	☒	☒	☒
413102.02	/	413102.12	☐	☒	☐	☐	☐
413103.01	/	413103.11	☒	☐	☒	☒	☒
413103.02	/	413103.12	☐	☒	☐	☐	☐
413104.01	/	413104.11	☒	☐	☒	☒	☒
413104.02	/	413104.12	☐	☒	☐	☐	☐
413105.01	/	413105.11	☒	☐	☒	☒	☒
413105.02	/	413105.12	☐	☒	☐	☐	☐
413106.01	/	413106.11	☒	☐	☒	☒	☒
413106.02	/	413106.12	☐	☒	☐	☐	☐



**** changes in inner equipment, locks or dimensions - please contact us**

 All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.

INTER SICHERHEITS SERVICE Sp. z o.o.

T +48 95 723 97 77 - 80

F +48 95 723 97 82

E biuro@iss.net.pl

66-400 Gorzów Wlkp.

ul. Kobylogórska 2

www.iss.net.pl

Model
save4ever II



Security level: Class II according to EN 1143-1

Suitable for the storage of:

- documents
- valuables

Description
Series **save4ever II** - high security safe - ECB•S certification.

Body: multi-walled body (50 mm thick)
Door: multi-walled door construction (106 mm thick)
Locking: 4-way locking bolt system - incl. overlapping profile on the hinge side

Standard option
Lock: high security key lock I class VdS with two keys (120 mm)
Boltwork handle: handle, protruding 60 mm
Hinges: external
Door opening angle: 180°
Mounting holes: 1 hole in the floor, 1 on the backwall (not drilled) up to 1/3 height
Colour: RAL 7035, RAL 7024



Model
save4ever II

Art. No.	Model	Outer dimensions*			Inner dimensions			Door light		Anchoring		Weight	Shelves	Files	Volume	Hooks
		Height mm	Width mm	Depth mm	Height mm	Width mm	Depth mm	Height mm	Width mm	Bottom number	Backwall number	Kg	Number	Number	Liters	Number
413100.00	save4ever II	450	450	465	350	340	305	318	334	1	1 **	109	1	4	36	5 ***
413101.00	save4ever II	550	550	465	450	440	305	418	434	1	1 **	145	1	7	60	5 ***
413102.00	save4ever II	700	550	465	600	440	305	568	434	1	1 **	173	1	9	81	5 ***
413103.00	save4ever II	850	550	465	750	440	305	718	434	1	1 **	201	1	10	101	5 ***
413104.00	save4ever II	1050	550	465	950	440	305	918	434	1	1 **	240	2	15	127	5 ***
413105.00	save4ever II	1200	550	465	1100	440	305	1068	434	1	1 **	268	2	18	148	5 ***
413106.00	save4ever II	1350	550	465	1250	440	305	1218	434	1	1 **	297	2	20	168	5 ***

* excluding hinges, handles and fittings ** not drilled *** hook strip for self assembly



Closure options						
Standard option			Options available against surcharge			
Key lock	Electronic lock Solar Basic	Mechanical code lock	Electronic lock Solar Business	Electronic lock Primor 3000 level 5	Electronic lock Primor 3000 level 15	Electronic lock B 30 (Excl. 413100.00)



All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.

FOAM SEAL
2 x 10 mm

A HOOK
BAR *

MOVABLE
SHELVES

CLASS
III
according to
EN 1143-1

Security level:
Class III according to EN 1143-1

Suitable for the storage of:

- office documents, office equipment
- valuables

Description

save4ever III series - high security safe - ECB•S certification.

Body: multi-walled body

Door: multi-walled door construction

Locking: 4-way locking bolt system - incl. overlapping profile on the hinge side

Standard option

Lock: high security key lock with two keys or electronic lock

Boltwork handle: handle, protruding 60 mm

Hinges: external

Door opening angle: 180°

Mounting holes: 1 hole in the floor, 1 on the backwall (not drilled) up to 1/3 height

Colour: RAL 7024, RAL 7035

save4ever III





key lock



419100.11 / 419100.01

419101.11 / 419101.01

419102.11 / 419102.01

419103.11 / 419103.01

Outer dimensions HxWxD (mm)	450 x 450 x 465	550 x 550 x 465	700 x 550 x 465	850 x 550 x 465
Inner dimensions HxWxD (mm)	350 x 340 x 305	450 x 440 x 305	600 x 440 x 305	750 x 440 x 305
Weight	177 kg	239 kg	287 kg	335 kg
Files number (pcs.):	4	7	9	12
Shelves number (pcs.):	1	1	1	1
Hooks on the hook bar (pcs.) *	5	5	5	5
Volume (l.)	36	60	81	101

Lock type	Key lock (2 keys included)			
Paint	RAL 7024 / RAL 7035			

* hook strip for self assembly



key lock



419104.11 / 419104.01

419105.11 / 419105.01

419106.11 / 419106.01

Outer dimensions HxWxD (mm)	1050 x 550 x 465	1200 x 550 x 465	1350 x 550 x 465
Inner dimensions HxWxD (mm)	950 x 440 x 305	1100 x 440 x 305	1250 x 440 x 305
Weight	401 kg	450 kg	501 kg
Files number (pcs.):	15	18	20
Shelves number (pcs.):	2	2	3
Hooks on the hook bar (pcs.) *	5	5	5
Volume (l.)	127	148	168

Lock type	Key lock (2 keys included)		
Paint	RAL 7024 / RAL 7035		

* hook strip for self assembly

**** changes in inner equipment, locks or dimensions - please contact us**



Electronic lock -
Solar Basic



419100.12 / 419100.02

419101.12 / 419101.02

419102.12 / 419102.02

419103.12 / 419103.02

Outer dimensions HxWxD (mm)	450 x 450 x 465	550 x 550 x 465	700 x 550 x 465	850 x 550 x 465
Inner dimensions HxWxD (mm)	350 x 340 x 305	450 x 440 x 305	600 x 440 x 305	750 x 440 x 305
Weight	177 kg	239 kg	287 kg	335 kg
Files number (pcs.):	4	7	9	12
Shelves number (pcs.):	1	1	1	1
Hooks on the hook bar (pcs.) *	5	5	5	5
Volume (l.)	36	60	81	101

Electronic lock - Solar Basic

RAL 7024 / RAL 7035

Paint
* hook strip for self assembly



Electronic lock -
Solar Basic



419104.12 / 419104.02

419105.12 / 419105.02

419106.12 / 419106.02

Outer dimensions HxWxD (mm)	1050 x 550 x 465	1200 x 550 x 465	1350 x 550 x 465
Inner dimensions HxWxD (mm)	950 x 440 x 305	1100 x 440 x 305	1250 x 440 x 305
Weight	401 kg	450 kg	501 kg
Files number (pcs.):	15	18	20
Shelves number (pcs.):	2	2	3
Hooks on the hook bar (pcs.) *	5	5	5
Volume (l.)	127	148	168

Electronic lock - Solar Basic

RAL 7024 / RAL 7035

Paint
* hook strip for self assembly

**** changes in inner equipment, locks or dimensions - please contact us**



Mechanical code lock



Electronic lock -
Solar Business



Electronic lock -
Primor 3000 level 5



Electronic lock -
Primor 3000 level 15



Electronic lock - B 30

Accessories available against surcharge

419100.01	/	419100.11
419100.02	/	419100.12
419101.01	/	419101.11
419101.02	/	419101.12
419102.01	/	419102.11
419102.02	/	419102.12
419103.01	/	419103.11
419103.02	/	419103.12
419104.01	/	419104.11
419104.02	/	419104.12
419105.01	/	419105.11
419105.02	/	419105.12
419106.01	/	419106.11
419106.02	/	419106.12

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☐

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐

☒

☐



**** changes in inner equipment, locks or dimensions - please contact us**



All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.

INTER SICHERHEITS SERVICE Sp. z o.o.

T +48 95 723 97 77 - 80

F +48 95 723 97 82


E biuro@iss.net.pl

66-400 Gorzów Wlkp.

ul. Kobylogórska 2

www.iss.net.pl

Model
save4ever III

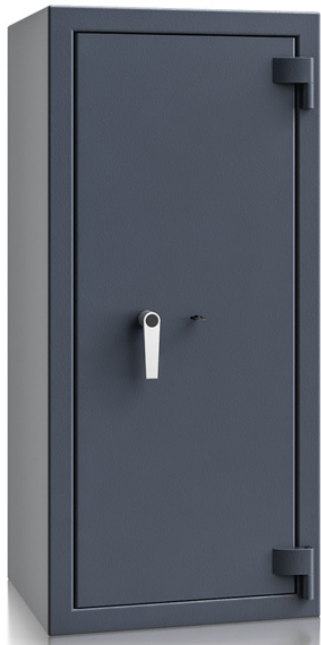

Security level: Class III according to EN 1143-1

Suitable for the storage of:

- documents
- valuables

Description

Series **save4ever III** - high security safe - ECB•S certification.

Body: multi-walled body (50 mm thick)

Door: multi-walled door construction (106 mm thick)

Locking: 4-way locking bolt system - incl. overlapping profile on the hinge side

Standard option

Lock: high security key lock II class VdS with two keys (135 mm)

Boltwork handle: handle, protruding 60 mm

Hinges: external

Door opening angle: 180°

Mounting holes: 1 hole in the floor, 1 on the backwall (not drilled) up to 1/3 height

Colour: RAL 7035, RAL 7024



Model
save4ever III

Art. No.	Model	Outer dimensions*			Inner dimensions			Door light		Anchoring		Weight	Shelves	Files	Volume	Hooks
		Height mm	Width mm	Depth mm	Height mm	Width mm	Depth mm	Height mm	Width mm	Bottom number	Backwall number	Kg	Number	Number	Liters	Number
419100.00	save4ever III	450	450	465	350	340	305	318	334	1	1 **	177	1	4	36	5 ***
419101.00	save4ever III	550	550	465	450	440	305	418	434	1	1 **	239	1	7	60	5 ***
419102.00	save4ever III	700	550	465	600	440	305	568	434	1	1 **	287	1	9	81	5 ***
419103.00	save4ever III	850	550	465	750	440	305	718	434	1	1 **	335	1	10	101	5 ***
419104.00	save4ever III	1050	550	465	950	440	305	918	434	1	1 **	401	2	15	127	5 ***
419105.00	save4ever III	1200	550	465	1100	440	305	1068	434	1	1 **	450	2	18	148	5 ***
419106.00	save4ever III	1350	550	465	1250	440	305	1218	434	1	1 **	501	2	20	168	5 ***

* excluding hinges, handles and fittings ** not drilled *** hook strip for self assembly




Body: multi-walled
body (50 mm thick)



Door: multi-walled door
construction (106 mm thick)

Closure options

Standard option



Key lock



Electronic lock
Solar Basic



Mechanical
code lock



Electronic lock
Solar Business



Electronic lock
Primor 3000 level 5



Electronic lock
Primor 3000 level 15



Electronic lock
B 30
(Excl. 419100.00)

Options available against surcharge



High security safes



All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.

High security safes



HINGES WITH DECORATIVE
ALUMINIUM PLUGS

VESTA
HANDLE
AS STANDARD



NEW BOLTWORK
AND BOLTS

Acc. to
EN 15659:2019 (E)
norm

Security level: Class IV according to EN 1143-1:2019

Fire rating: Fire-protected safes according to
EN 15659:2019, LFS 30

Suitable for the storage of:

- 🔑 office documents, office equipment
- 💎 valuables

Description

Series **save4ever IV** - safes with ECB•S certificate for storage of valuables.

Double protective mechanism: additional glass plate, which triggers bolting protection against the burglary attempt.

Body: multi-walled body

Door: multi-walled door construction

Locking: 4-way locking bolt system - incl. overlapping profile on the hinge side

Standard option

Lock: 2 high security key locks II class VdS II/IMP - class B (each lock with 2 keys)

Boltwork handle: handle protruding 79 mm

Hinges: External

Door opening angle: 180°

Mounting holes: 1 hole in the bottom, 1 blind hole in the back wall up to 1/3 height (assembly set for 1 hole as standard)

Additional equipment: each model prepared for alarm installation

Paint: RAL 7024, RAL 7035

save4ever IV





key lock



425100.11 / 425100.01

Outer dimensions HxWxD (mm)	625 x 500 x 500
Inner dimensions HxWxD (mm)	505 x 370 x 305
Weight	306 kg
Files number (pcs.):	6
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.) *	5
Volume (l.)	57
Lock type	
Paint	

* hook strip for self assembly



425101.11 / 425101.01

Outer dimensions HxWxD (mm)	625 x 570 x 500
Inner dimensions HxWxD (mm)	505 x 440 x 305
Weight	349 kg
Files number (pcs.):	6
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.) *	5
Volume (l.)	64
Lock type	
Paint	



425102.11 / 425102.01

Outer dimensions HxWxD (mm)	720 x 570 x 500
Inner dimensions HxWxD (mm)	600 x 440 x 305
Weight	371 kg
Files number (pcs.):	8
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.) *	5
Volume (l.)	81
Lock type	Double key locks (each with 2 keys)
Paint	RAL 7024 / RAL 7035



425103.11 / 425103.01

Outer dimensions HxWxD (mm)	870 x 570 x 500
Inner dimensions HxWxD (mm)	750 x 440 x 305
Weight	436 kg
Files number (pcs.):	10
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.) *	5
Volume (l.)	101
Lock type	
Paint	



425104.11 / 425104.01

Outer dimensions HxWxD (mm)	1070 x 570 x 500
Inner dimensions HxWxD (mm)	950 x 440 x 305
Weight	523 kg
Files number (pcs.):	13
Shelves number (pcs.):	2
Hooks on the hook bar (pcs.) *	5
Volume (l.)	127
Lock type	
Paint	



key lock



425105.11 / 425105.01

Outer dimensions HxWxD (mm)	1220 x 570 x 500
Inner dimensions HxWxD (mm)	1100 x 440 x 305
Weight	589 kg
Files number (pcs.):	15
Shelves number (pcs.):	2
Hooks on the hook bar (pcs.) *	5
Volume (l.)	148
Lock type	
Paint	

* hook strip for self assembly



425106.11 / 425106.01

Outer dimensions HxWxD (mm)	1370 x 570 x 500
Inner dimensions HxWxD (mm)	1250 x 440 x 305
Weight	654 kg
Files number (pcs.):	17
Shelves number (pcs.):	3
Hooks on the hook bar (pcs.) *	5
Volume (l.)	168
Lock type	
Paint	



425107.11 / 425107.01

Outer dimensions HxWxD (mm)	770 x 700 x 540
Inner dimensions HxWxD (mm)	650 x 570 x 345
Weight	476 kg
Files number (pcs.):	11
Shelves number (pcs.):	1
Hooks on the hook bar (pcs.) *	5
Volume (l.)	128
Lock type	Double key locks (each with 2 keys)
Paint	RAL 7024 / RAL 7035



425108.11 / 425108.01

Outer dimensions HxWxD (mm)	1220 x 700 x 540
Inner dimensions HxWxD (mm)	1100 x 570 x 345
Weight	706 kg
Files number (pcs.):	21
Shelves number (pcs.):	2
Hooks on the hook bar (pcs.) *	5
Volume (l.)	216
Lock type	
Paint	



425109.11 / 425109.01

Outer dimensions HxWxD (mm)	1470 x 700 x 540
Inner dimensions HxWxD (mm)	1350 x 570 x 345
Weight	834 kg
Files number (pcs.):	25
Shelves number (pcs.):	3
Hooks on the hook bar (pcs.) *	5
Volume (l.)	265
Lock type	
Paint	



key lock



425110.11 / 425110.01

Outer dimensions HxWxD (mm)	1476 x 806 x 540
Inner dimensions HxWxD (mm)	1356 x 676 x 345
Weight	920 kg
Files number (pcs.):	35
Shelves number (pcs.):	3
Hooks on the hook bar (pcs.) *	5
Volume (l.)	316
Lock type	
Paint	

* hook strip for self assembly



425111.11 / 425111.01

Outer dimensions HxWxD (mm)	1776 x 806 x 540
Inner dimensions HxWxD (mm)	1656 x 676 x 345
Weight	1087 kg
Files number (pcs.):	42
Shelves number (pcs.):	4
Hooks on the hook bar (pcs.) *	5
Volume (l.)	386
Lock type	
Paint	



425112.11 / 425112.01

Outer dimensions HxWxD (mm)	1226 x 836 x 690
Inner dimensions HxWxD (mm)	1106 x 706 x 495
Weight	927 kg
Files number (pcs.):	27
Shelves number (pcs.):	2
Hooks on the hook bar (pcs.) *	5
Volume (l.)	387
Lock type	Double key locks (each with 2 keys)
Paint	RAL 7024 / RAL 7035



425113.11 / 425113.01


Outer dimensions HxWxD (mm)	1476 x 836 x 690
Inner dimensions HxWxD (mm)	1356 x 706 x 495
Weight	1088 kg
Files number (pcs.):	35
Shelves number (pcs.):	3
Hooks on the hook bar (pcs.) *	5
Volume (l.)	474
Lock type	
Paint	



425114.11 / 425114.01

Outer dimensions HxWxD (mm)	1776 x 836 x 690
Inner dimensions HxWxD (mm)	1656 x 706 x 495
Weight	1281 kg
Files number (pcs.):	35
Shelves number (pcs.):	4
Hooks on the hook bar (pcs.) *	5
Volume (l.)	579
Lock type	
Paint	

**** available options of changing the lock**

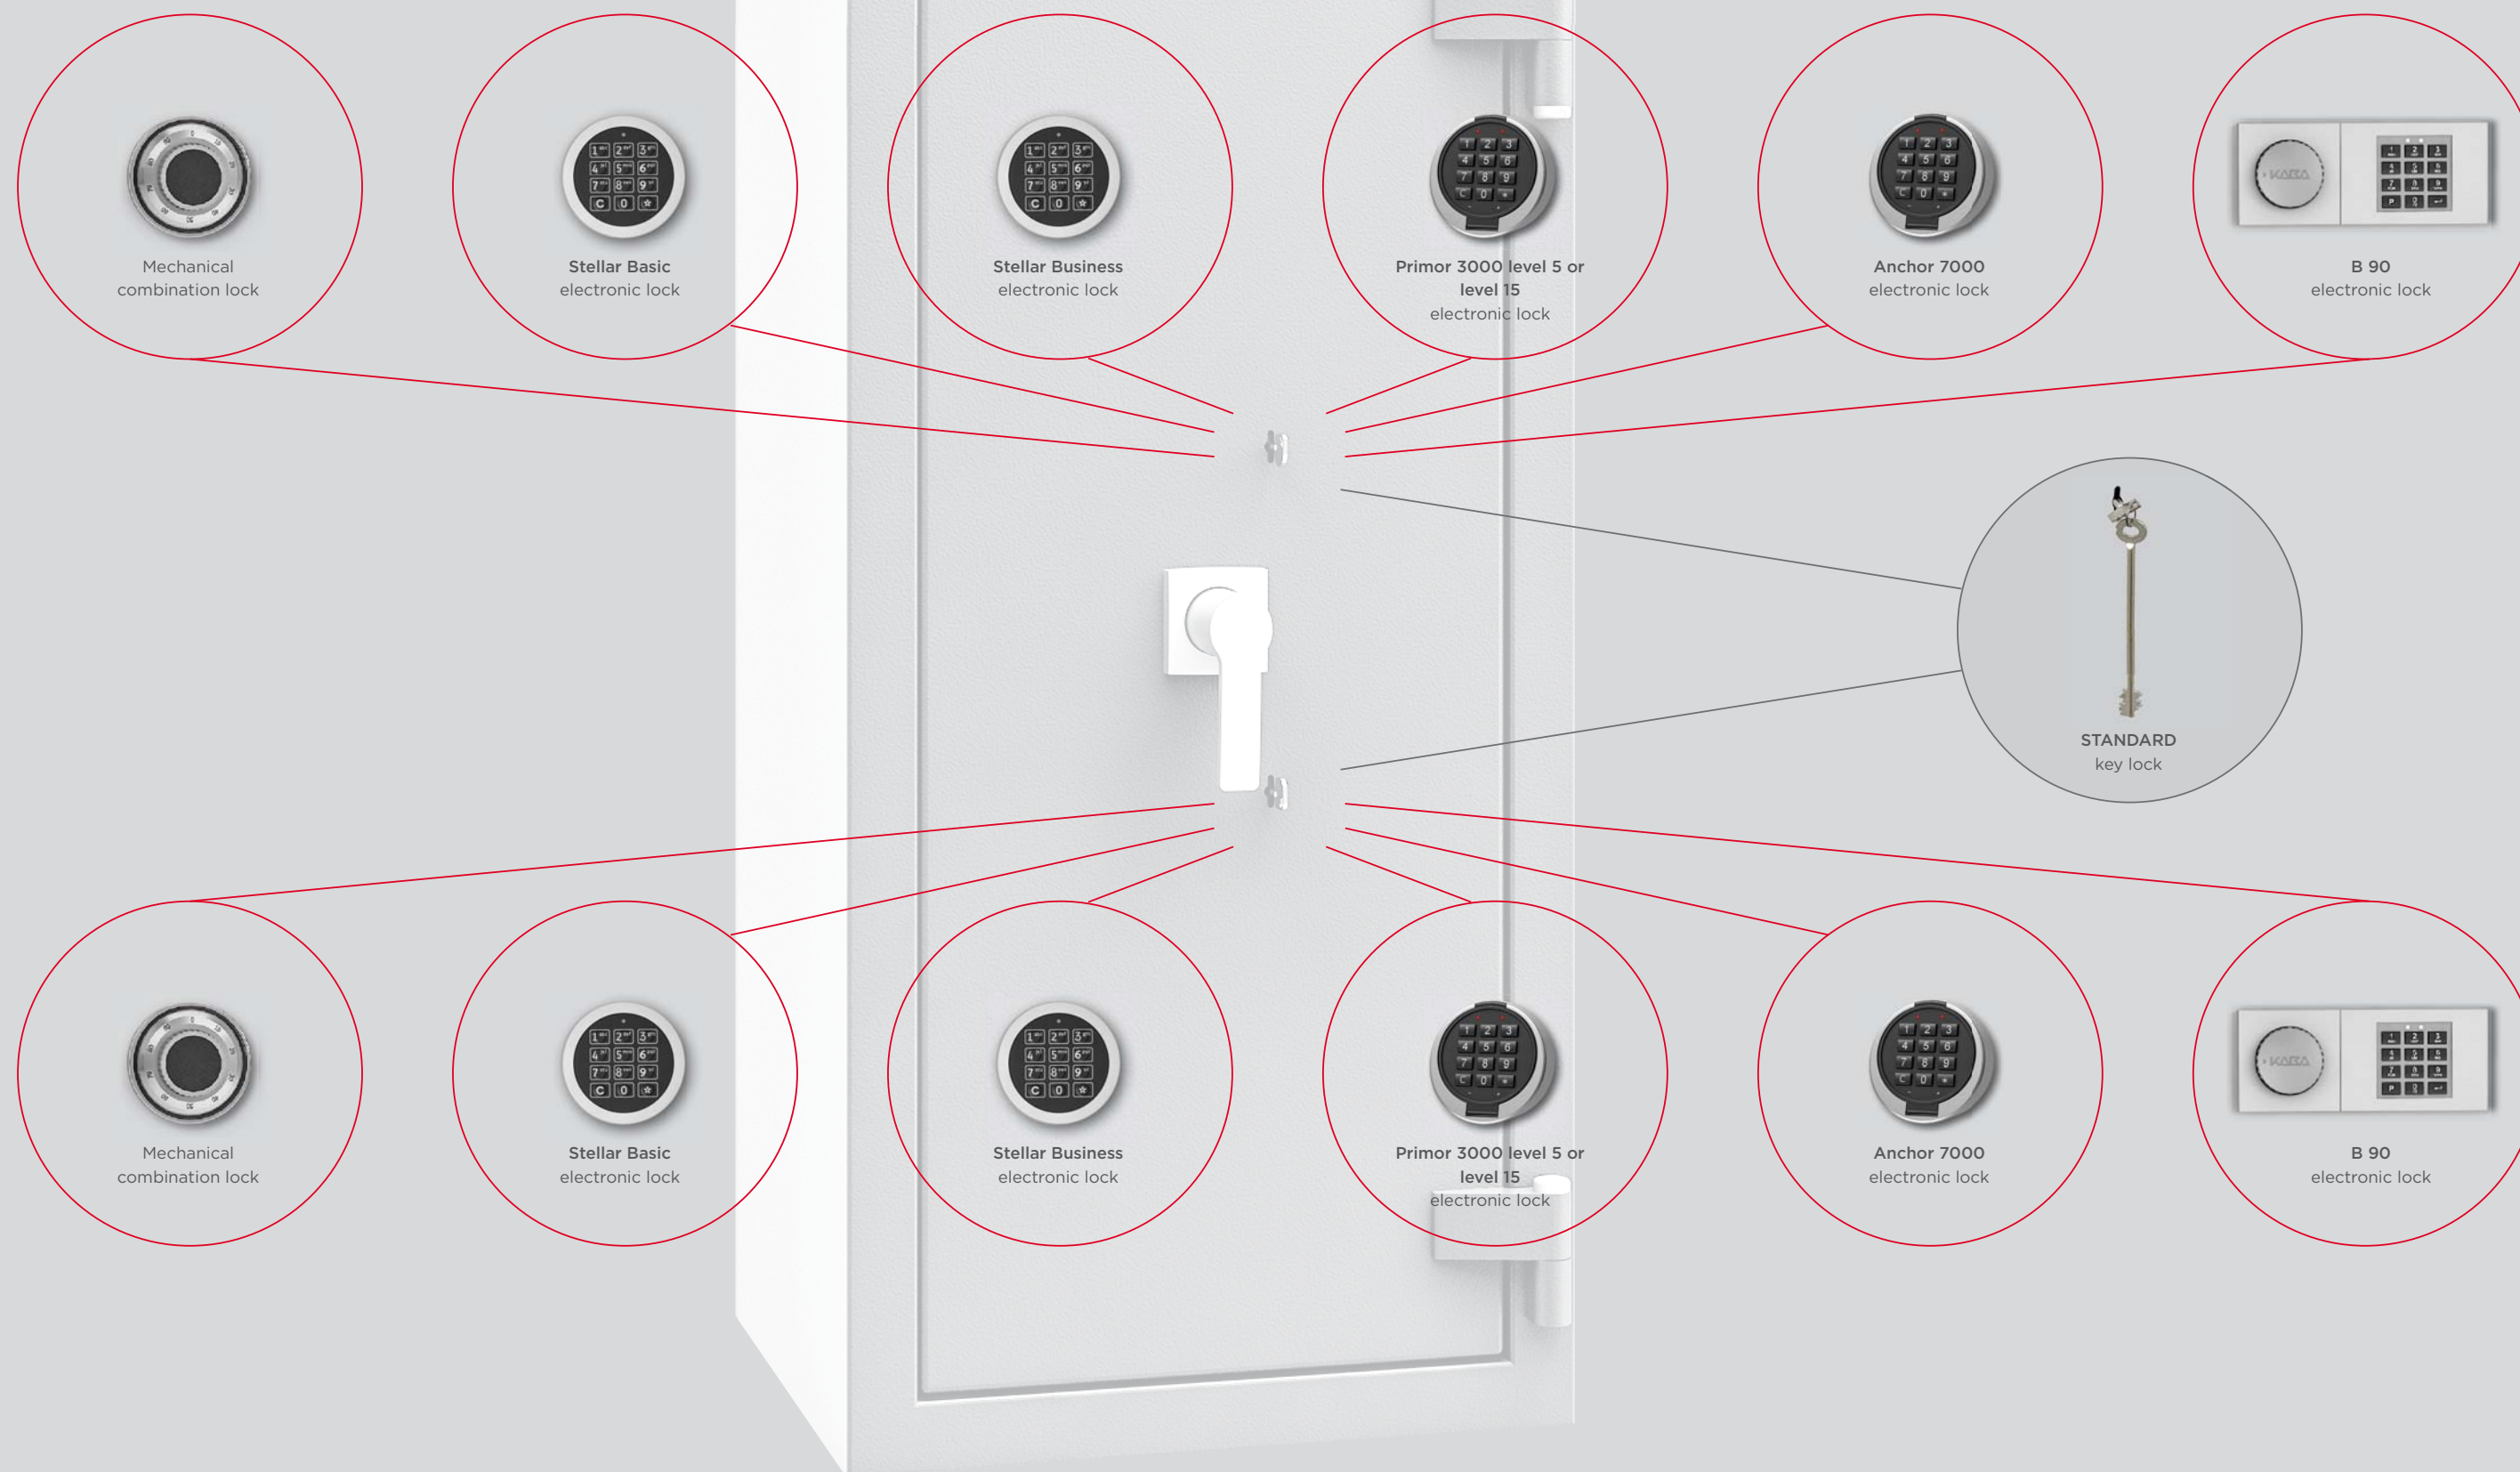

Possible lock configurations



Mechanical combination lock

Key lock



Stellar Basic - electronic lock

Key lock



Stellar Business - electronic lock

Key lock



Primor 3000 level 5 or level 15 - electronic lock

Key lock



Anchor 7000 - electronic lock

Key lock




B 90 - electronic lock

Key lock



Mechanical combination lock

Mechanical combination lock

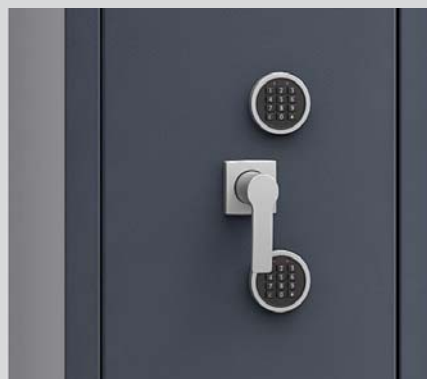

Stellar Basic - electronic lock

Stellar Basic - electronic lock



Stellar Business - electronic lock

Stellar Business - electronic lock



Primor 3000 level 5 or level 15 - electronic lock

Primor 3000 level 5 or level 15 - electronic lock



Anchor 7000 - electronic lock

Anchor 7000 - electronic lock




B 90 - electronic lock

B 90 - electronic lock



Preparation for alarm system

save4ever IV series has standard holes that enable the installation of alarm system components.

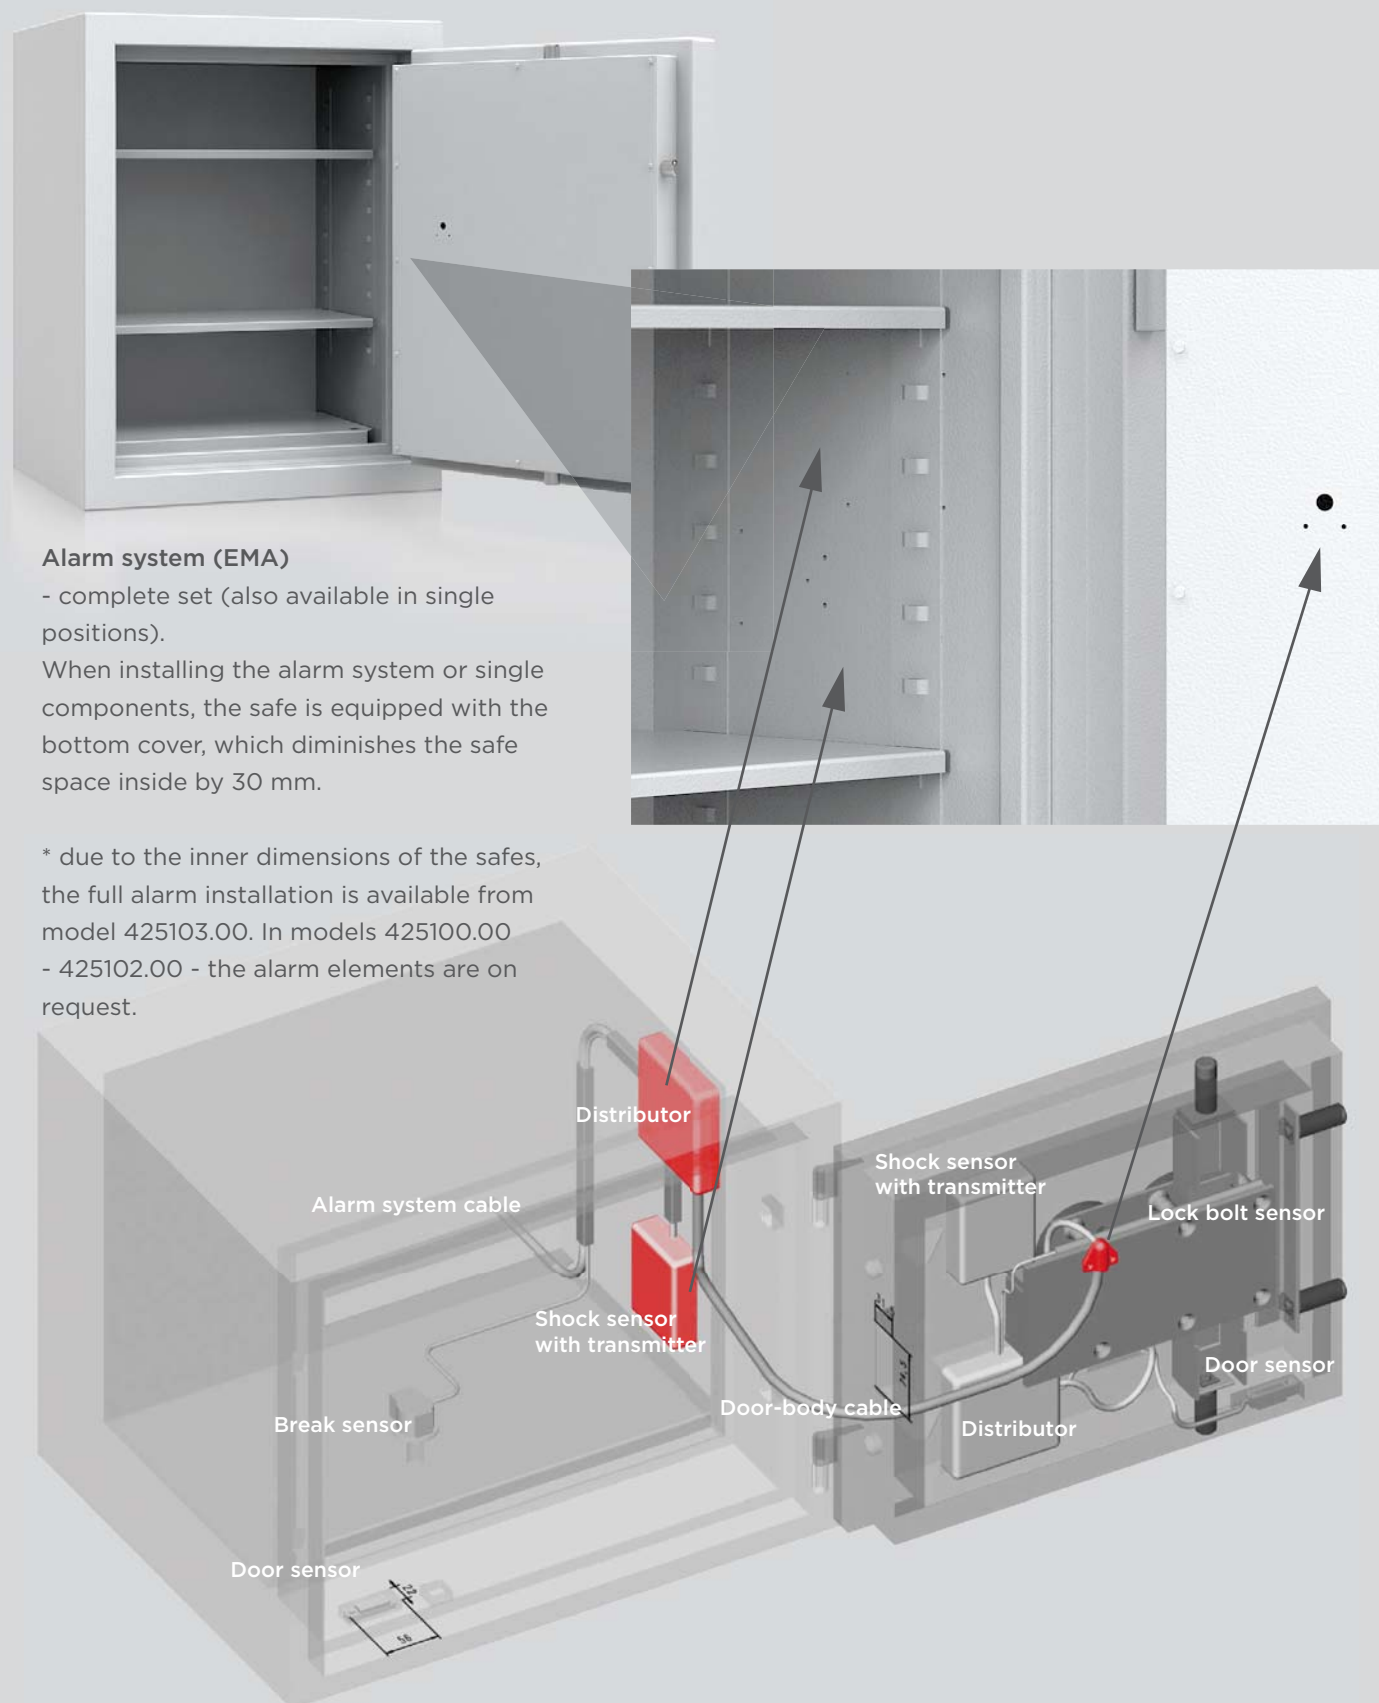

Alarm system (EMA)

- complete set (also available in single positions).

When installing the alarm system or single components, the safe is equipped with the bottom cover, which diminishes the safe space inside by 30 mm.

* due to the inner dimensions of the safes, the full alarm installation is available from model 425103.00. In models 425100.00 - 425102.00 - the alarm elements are on request.

Fire resistance of class IV safes

The real and functional fire resistance of safes is one that is confirmed by **certificates and appropriate tests**.

Fire resistance is the ability of safes to meet certain requirements during a fire.

The measure of the fire resistance of safes is the time expressed in minutes, in a simplified way illustrating how long a given safe can protect its contents from extremely severe conditions during a fire and fire action.


The light fire resistance defined by the LFS 30 class provides the stored property with short-term fire protection of 30 minutes.

Norm EN 15659:2019 implies heating the safe together with furnace according to temperature curve up to 840°C, and measuring the temperature in critical parts of the safe inside when it is heated up.

Certification label permanently fixed to the safe is a **guarantee for properly conducted test in specialized certification institutes**.



Acc. to
EN 15659:2019 (E)
norm

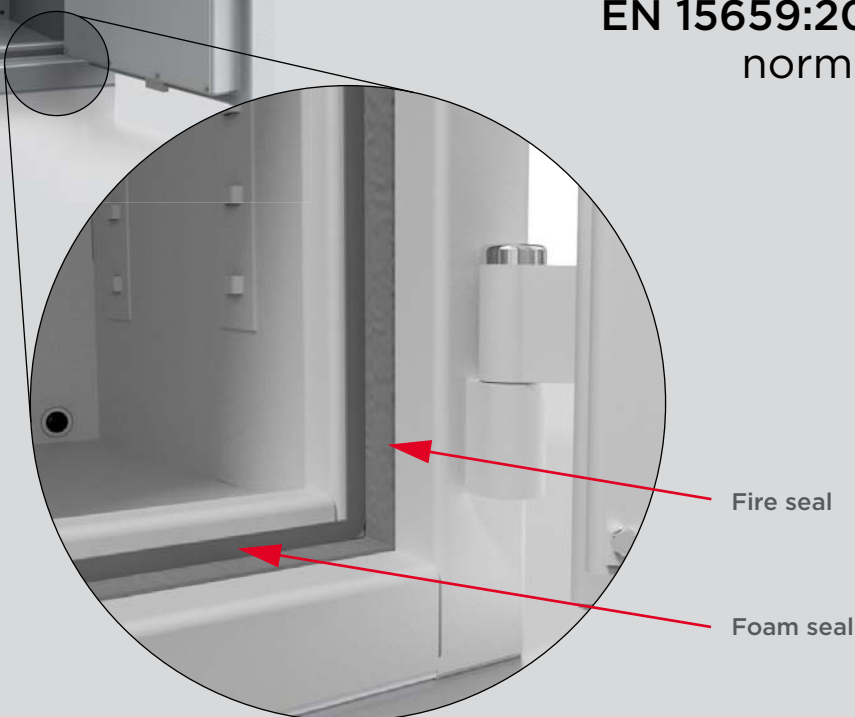



Model
save4ever IV



Security level: Class IV ECB•S according to EN 1143-1:2019
Fire rating: Fire-protected safes according to EN 15659:2019, LFS 30

Suitable for the storage of:

- valuables
- documents
- gun

Description

Series **save4ever IV** - safes with ECB•S certificate for storage of valuables.
Double protective mechanism: additional glass plate, which triggers bolting protection against the burglary attempt.

Body: multi-walled body (60 mm thick)
Door: multi-walled door construction (120 mm thick)
Locking: 4-way locking bolt system - incl. overlapping profile on the hinge side

Standard option

Lock: 2 high security key locks II class VdS II/IMP - class B (each lock with 2 keys)
Boltwork handle: handle protruding 79 mm
Hinges: External
Door opening angle: 180°
Mounting holes: 1 hole in the bottom, 1 blind hole in the back wall up to 1/3 height (assembly set for 1 hole as standard)
Additional equipment: each model prepared for alarm installation
Paint: RAL 7024, RAL 7035



Model
save4ever IV

Art. No.	Model	Outer dimensions*			Inner dimensions			Door light		Anchoring		Weight	Shelves	Files	Volume	Hooks
		Height mm	Width mm	Depth mm	Height mm	Width mm	Depth mm	Height mm	Width mm	Bottom number	Backwall number	Kg	Number	Number	Liters	Number
425100.00	save4ever IV	625	500	500	505	370	305	469	350	1	1 **	306	1	6	57	5 ***
425101.00	save4ever IV	625	570	500	505	440	305	469	420	1	1 **	349	1	6	64	5 ***
425102.00	save4ever IV	720	570	500	600	440	305	564	420	1	1 **	371	1	8	81	5 ***
425103.00	save4ever IV	870	570	500	750	440	305	714	420	1	1 **	436	1	10	101	5 ***
425104.00	save4ever IV	1070	570	500	950	440	305	914	420	1	1 **	523	2	13	127	5 ***
425105.00	save4ever IV	1220	570	500	1100	440	305	1064	420	1	1 **	589	2	15	148	5 ***
425106.00	save4ever IV	1370	570	500	1250	440	305	1214	420	1	1 **	654	3	17	168	5 ***
425107.00	save4ever IV	770	700	540	650	570	345	614	550	1	1 **	476	1	11	128	5 ***
425108.00	save4ever IV	1220	700	540	1100	570	345	1064	550	1	1 **	706	2	21	216	5 ***
425109.00	save4ever IV	1470	700	540	1350	570	345	1314	550	1	1 **	834	3	25	265	5 ***
425110.00	save4ever IV	1476	806	540	1356	676	345	1320	656	1	1 **	920	3	35	316	5 ***
425111.00	save4ever IV	1776	806	540	1656	676	345	1620	656	1	1 **	1087	4	42	386	5 ***
425112.00	save4ever IV	1226	836	690	1106	706	495	1070	686	1	1 **	927	2	27	387	5 ***
425113.00	save4ever IV	1476	836	690	1356	706	495	1320	686	1	1 **	1088	3	35	474	5 ***
425114.00	save4ever IV	1776	836	690	1656	706	495	1620	686	1	1 **	1281	4	42	579	5 ***

* excluding hinges, handles and fittings ** not drilled *** hook strip for self assembly



Body: multi-walled
body (60 mm thick)



Door: multi-walled door
construction (120 mm thick)

Closure options

Standard option

Options available against surcharge



Key lock



Mechanical
code lock



Electronic lock
Stellar Basic




Electronic lock
Stellar Business



Electronic lock
Primor 3000 level 5




Electronic lock
Primor 3000 level 15



Electronic lock
B 90

Accessories available against surcharge

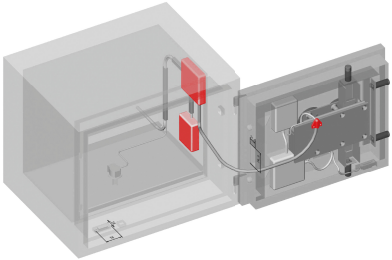

Alarm system (EMA) - complete set
(also available in single positions).

When installing the alarm system or single
components, the safe is equipped with the
bottom cover, which diminishes the safe
space inside by 30 mm.

* due to the inner dimensions of the safes,
the full alarm installation is available from
model 425103.00. In models 425100.00
- 425102.00 - the alarm elements are on
request.



All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.



VESTA
HANDLE
AS STANDARD

HINGES WITH DECORATIVE
ALUMINIUM PLUGS



NEW BOLTWORK
AND BOLTS



Acc. to
EN 15659:2019 (E)
norm

Security level: Class V according to EN 1143-1:2019

Fire rating: Fire-protected safes according to
EN 15659:2019, LFS 30

Suitable for the storage of:

- office documents, office equipment
- valuables

Description

Series **save4ever V** - safes with ECB•S certificate for storage of valuables.

Double protective mechanism: additional glass plate, which triggers bolting protection against the burglary attempt.

Body: multi-walled body

Door: multi-walled door construction

Locking: 4-way locking bolt system - incl. overlapping profile on the hinge side

Standard option

Lock: 2 high security key locks II class VdS II/IMP - class B (each lock with 2 keys)

Boltwork handle: handle protruding 79 mm

Hinges: External

Door opening angle: 180°

Mounting holes: 1 hole in the bottom, 1 blind hole in the back wall up to 1/3 height (assembly set for 1 hole as standard)

Additional equipment: each model prepared for alarm installation

Paint: RAL 7024, RAL 7035

save4ever V





key lock



427100.11 / 427100.01



427101.11 / 427101.01



427102.11 / 427102.01



427103.11 / 427103.01



427104.11 / 427104.01

Outer dimensions HxWxD (mm)	660 x 536 x 525	660 x 606 x 525	756 x 606 x 525	906 x 606 x 525	1106 x 606 x 525
Inner dimensions HxWxD (mm)	504 x 370 x 305	504 x 440 x 305	600 x 440 x 305	750 x 440 x 305	950 x 440 x 305
Weight	373 kg	406 kg	455 kg	531 kg	633 kg
Files number (pcs.):	6	6	8	10	13
Shelves number (pcs.):	1	1	1	1	2
Hooks on the hook bar (pcs.) *	5	5	5	5	5
Volume (l.)	57	68	81	101	127
Lock type	Double key locks (each with 2 keys)				
Paint	RAL 7024 / RAL 7035				

* hook strip for self assembly



key lock



427105.11 / 427105.01



427106.11 / 427106.01



427107.11 / 427107.01



427108.11 / 427108.01



427109.11 / 427109.01

Outer dimensions HxWxD (mm)	1256 x 606 x 525	1406 x 606 x 525	806 x 736 x 565	1256 x 736 x 565	1506 x 736 x 565
Inner dimensions HxWxD (mm)	1100 x 440 x 305	1250 x 440 x 305	650 x 570 x 345	1100 x 570 x 345	1350 x 570 x 345
Weight	709 kg	785 kg	580 kg	846 kg	994 kg
Files number (pcs.):	15	17	11	21	25
Shelves number (pcs.):	2	3	1	2	3
Hooks on the hook bar (pcs.) *	5	5	5	5	5
Volume (l.)	127	168	128	216	265
Lock type	Double key locks (each with 2 keys)				
Paint	RAL 7024 / RAL 7035				

* hook strip for self assembly



key lock



427110.11 / 427110.01



427111.11 / 427111.01



427112.11 / 427112.01



427113.11 / 427113.01




427114.11 / 427114.01

Outer dimensions HxWxD (mm)	1512 x 842 x 565	1812 x 842 x 565	1262 x 872 x 715	1512 x 872 x 715	1812 x 872 x 715
Inner dimensions HxWxD (mm)	1356 x 676 x 345	1656 x 676 x 345	1106 x 706 x 495	1356 x 706 x 495	1656 x 706 x 495
Weight	1093 kg	1285 kg	1108 kg	1294,4 kg	1516 kg
Files number (pcs.):	35	42	27	35	42
Shelves number (pcs.):	3	4	2	3	4
Hooks on the hook bar (pcs.) *	5	5	5	5	5
Volume (l.)	316	386	387	474	579
Lock type	Double key locks (each with 2 keys)				
Paint	RAL 7024 / RAL 7035				

* hook strip for self assembly

**** available options of changing the lock**

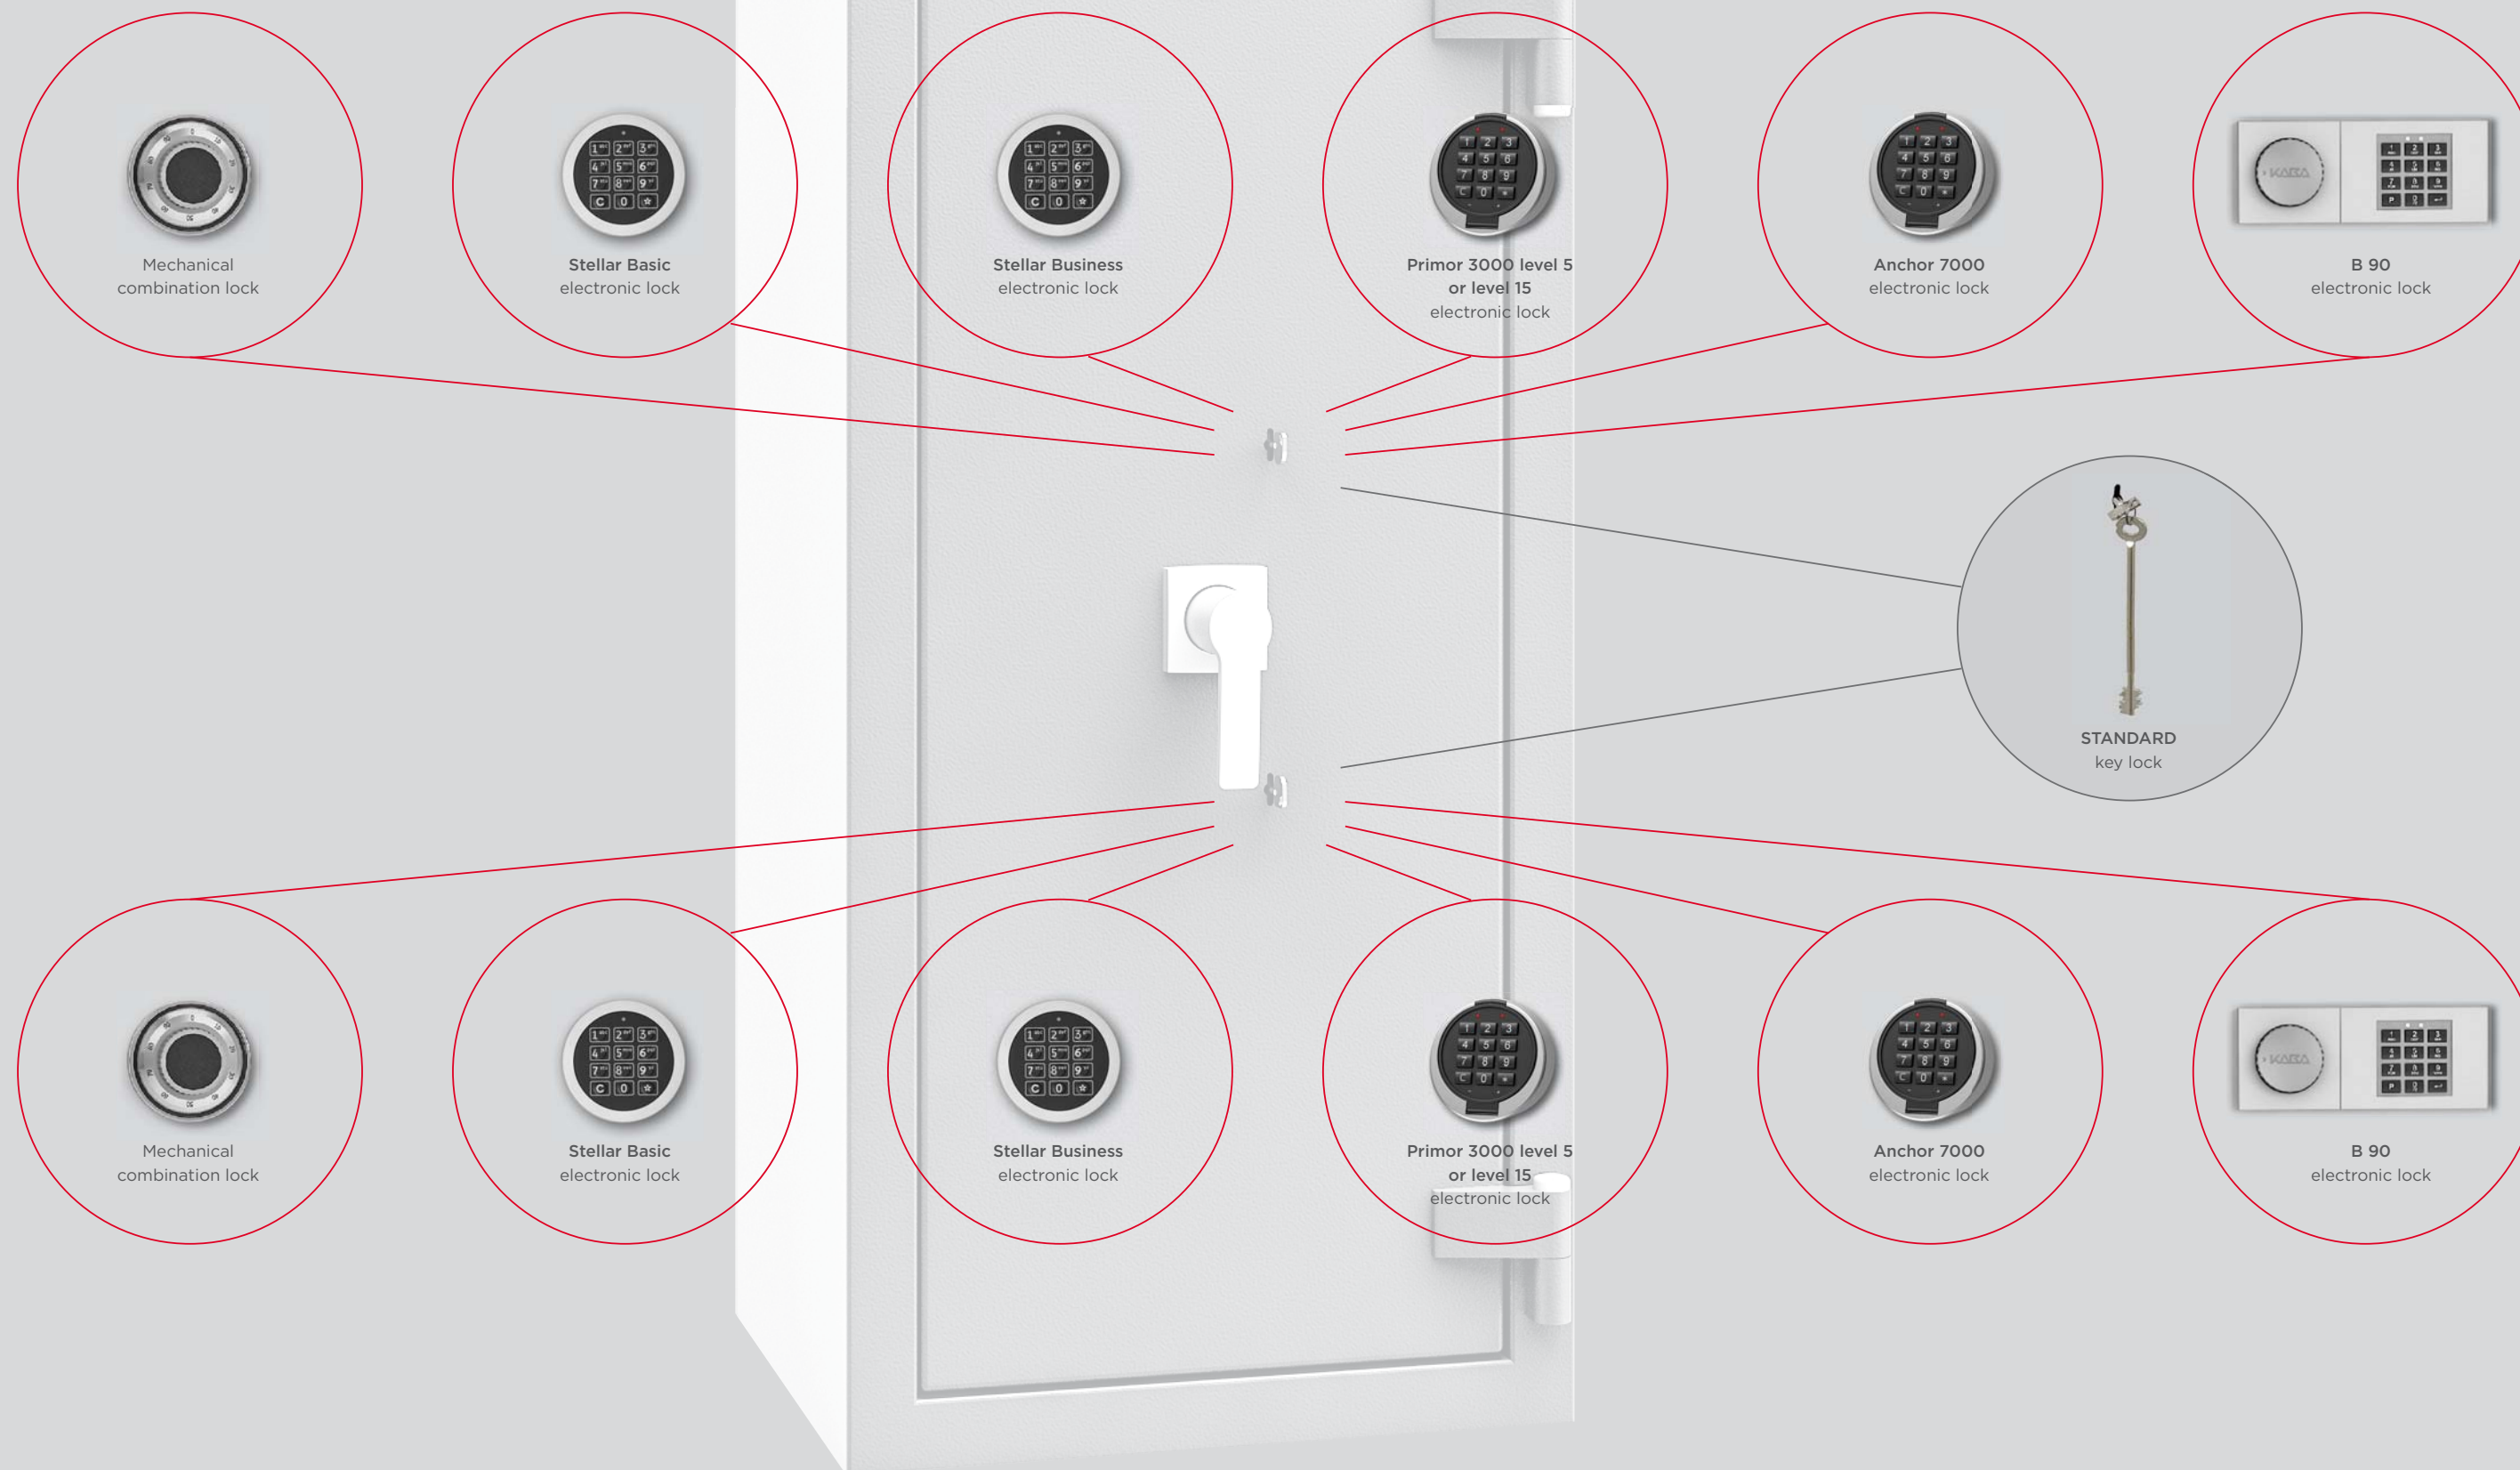

Possible lock configurations



Mechanical combination lock

Key lock



Stellar Basic - electronic lock

Key lock



Stellar Business - electronic lock

Key lock



Primor 3000 level 5 or level 15 - electronic lock

Key lock



Anchor 7000 - electronic lock

Key lock




B 90 - electronic lock

Key lock



Mechanical combination lock

Mechanical combination lock

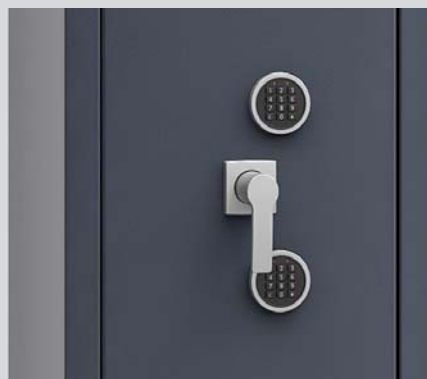

Stellar Basic - electronic lock

Stellar Basic - electronic lock



Stellar Business - electronic lock

Stellar Business - electronic lock



Primor 3000 level 5 or level 15 - electronic lock

Primor 3000 level 5 or level 15 - electronic lock



Anchor 7000 - electronic lock

Anchor 7000 - electronic lock




B 90 - electronic lock

B 90 - electronic lock



Preparation for alarm system

save4ever V series has standard holes that enable the installation of alarm system components.

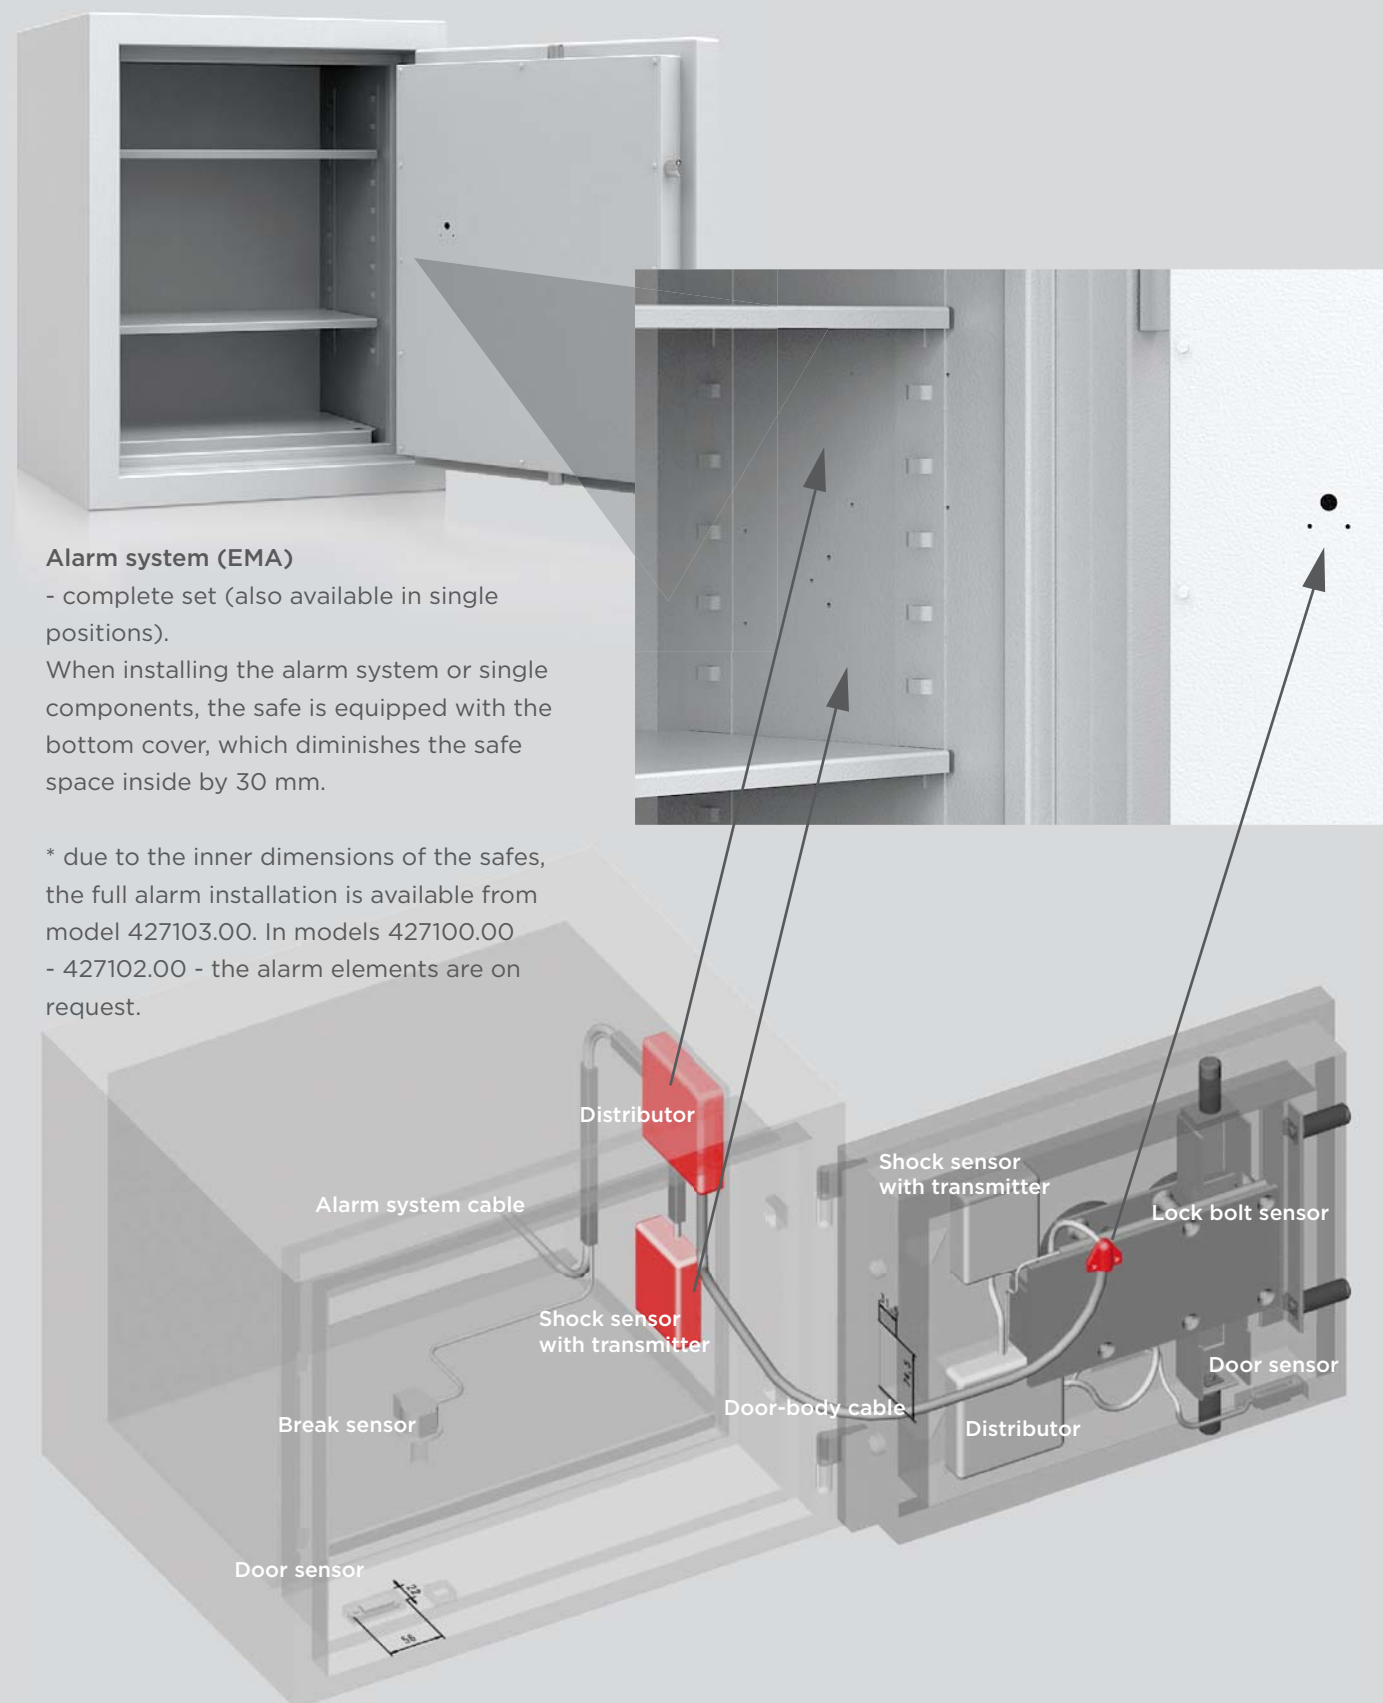

Fire resistance of class V safes

The real and functional fire resistance of safes is one that is confirmed by **certificates and appropriate tests**.

Fire resistance is the ability of safes to meet certain requirements during a fire. The measure of the fire resistance of safes is the time expressed in minutes, in a simplified way illustrating how long a given safe can protect its contents from extremely severe conditions during a fire and fire action.

The light fire resistance defined by the LFS 30 class provides the stored property with short-term fire protection of 30 minutes.

Norm EN 15659:2019 implies heating the safe together with furnace according to temperature curve up to 840°C, and measuring the temperature in critical parts of the safe inside when it is heated up.

Certification label permanently fixed to the safe is a **guarantee for properly conducted test in specialized certification institutes**.





Model
save4ever V



Security level: Class V ECB•S according to EN 1143-1:2019
Fire rating: Fire-protected safes according to EN 15659:2019, LFS 30

Suitable for the storage of:

- valuables
- documents
- gun

Description

Series **save4ever V** - safes with ECB•S certificate for storage of valuables.
Double protective mechanism: additional glass plate, which triggers bolting protection against the burglary attempt.

Body: multi-walled body (78 mm thick)
Door: multi-walled door construction (137 mm thick)
Locking: 4-way locking bolt system - incl. overlapping profile on the hinge side

Standard option

Lock: 2 high security key locks II class VdS II/IMP - class B (each lock with 2 keys)

Boltwork handle: handle protruding 79 mm

Hinges: External

Door opening angle: 180°

Mounting holes: 1 hole in the bottom, 1 blind hole in the back wall up to 1/3 height (assembly set for 1 hole as standard)

Additional equipment: each model prepared for alarm installation

Paint: RAL 7024, RAL 7035



Model
save4ever V

Art. No.	Model	Outer dimensions*			Inner dimensions			Door light		Anchoring		Weight	Shelves	Files	Volume	Hooks
		Height mm	Width mm	Depth mm	Height mm	Width mm	Depth mm	Height mm	Width mm	Bottom number	Backwall number	Kg	Number	Number	Liters	Number
427100.00	save4ever V	660	536	525	504	370	305	469	350	1	1 **	373	1	6	57	5 ***
427101.00	save4ever V	660	606	525	504	440	305	469	350	1	1 **	406	1	6	68	5 ***
427102.00	save4ever V	756	606	525	600	440	305	564	420	1	1 **	455	1	8	81	5 ***
427103.00	save4ever V	906	606	525	750	440	305	714	420	1	1 **	531	1	10	101	5 ***
427104.00	save4ever V	1106	606	525	950	440	305	914	420	1	1 **	633	2	13	127	5 ***
427105.00	save4ever V	1256	606	525	1100	440	305	1064	420	1	1 **	709	2	15	127	5 ***
427106.00	save4ever V	1406	606	525	1250	440	305	1214	420	1	1 **	785	3	17	168	5 ***
427107.00	save4ever V	806	736	565	650	570	345	614	550	1	1 **	580	1	11	128	5 ***
427108.00	save4ever V	1256	736	565	1100	570	345	1064	550	1	1 **	846	2	21	216	5 ***
427109.00	save4ever V	1506	736	565	1350	570	345	1314	550	1	1 **	994	3	25	265	5 ***
427110.00	save4ever V	1512	842	565	1356	676	345	1320	656	1	1 **	1093	3	35	316	5 ***
427111.00	save4ever V	1812	842	565	1656	676	345	1620	656	1	1 **	1285	4	42	386	5 ***
427112.00	save4ever V	1262	872	715	1106	706	495	1070	686	1	1 **	1108	2	27	387	5 ***
427113.00	save4ever V	1512	872	715	1356	706	495	1320	686	1	1 **	1294	3	35	474	5 ***
427114.00	save4ever V	1812	872	715	1656	706	495	1620	686	1	1 **	1516	4	42	579	5 ***

* excluding hinges, handles and fittings ** not drilled *** hook strip for self assembly



Body: multi-walled
body (78 mm thick)



Door: multi-walled door
construction (137 mm thick)

Closure options

Standard option

Options available against surcharge



Key lock



Mechanical
code lock



Electronic lock
Stellar Basic




Electronic lock
Stellar Business



Electronic lock
Primor 3000 level 5




Electronic lock
Primor 3000 level 15



Electronic lock
B 90

Accessories available against surcharge

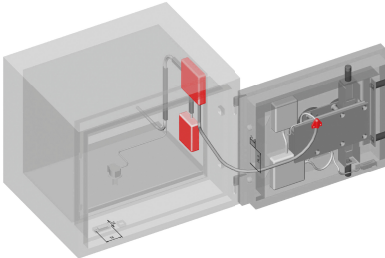

Alarm system (EMA) - complete set
(also available in single positions).

When installing the alarm system or single
components, the safe is equipped with the
bottom cover, which diminishes the safe
space inside by 30 mm.

* due to the inner dimensions of the safes,
the full alarm installation is available from
model 427103.00. In models 427100.00
- 427102.00 - the alarm elements are on
request.



All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.

HINGES WITH DECORATIVE
ALUMINIUM PLUGS

VESTA DOOR HANDLE
AND ROSETTES
IN THE STANDARD

NEW BOLTWORK
AND BOLTS



According to
EN 15659:2019
norm

Security level: Class VI according to EN 1143-1:2019
Fire rating: Fire-protected safes according
to EN 15659:2019 LFS 30 P

Suitable for the storage of

-  valuables
-  documents

Description

Series **save4ever VI** - safes with ECB•S certificate for storage of valuables.
Double protective mechanism: additional glass plate, which triggers bolting protection against the burglary attempt.

Body: multi-walled body

Door: multi-walled door construction with stainless steel handle for easy door opening

Locking: 2-way locking bolt system - incl. overlapping profile on the hinge side.

Standard option

Lock: 2 high security key locks III class VdS III - class C (each lock with 2 keys)

Boltwork handle: handle, protruding 79 mm

Hinges: external

Door opening angle: 180°

Mounting holes: 1 hole in the bottom, 1 blind hole in the back wall up to 1/3 height (assembly set for 1 hole as standard)

Additional equipment: each model prepared for alarm installation

Colour: RAL 9005, RAL 7035

save4ever VI





key lock



428100.21 / 428100.01



428101.21 / 428101.01



428102.21 / 428102.01

Outer dimensions HxWxD (mm)	790 x 660 x 620	840 x 690 x 620	990 x 690 x 620
Inner dimensions HxWxD (mm)	550 x 410 x 305	600 x 440 x 305	750 x 440 x 305
Weight	740 kg	810 kg	930 kg
Shelves number (pcs.):	1	1	1
Hooks on the hook bar (pcs.) *	5	5	5
Volume (l.)	69	81	101
Lock type	Double key locks (each with 2 keys)		
Paint	RAL 9005 / RAL 7035		

* hook strip for self assembly



key lock



428103.21 / 428103.01



428104.21 / 428104.01



428105.21 / 428105.01

Outer dimensions HxWxD (mm)	1190 x 690 x 620	1340 x 690 x 620	1490 x 690 x 620
Inner dimensions HxWxD (mm)	950 x 440 x 305	1100 x 440 x 305	1250 x 440 x 305
Weight	1090 kg	1220 kg	1340 kg
Shelves number (pcs.):	2	2	3
Hooks on the hook bar (pcs.) *	5	5	5
Volume (l.)	127	148	168
Lock type	Double key locks (each with 2 keys)		
Paint	RAL 9005 / RAL 7035		

* hook strip for self assembly

** available options of changing the lock



810137.00

OPTION WITHOUT ADDITIONAL CHARGE

Key lock
class C/III with 2 keys
(1 standard, 1 detachable)



810205.01 / 820203.00

OPTION WITHOUT ADDITIONAL CHARGE

Mechanical combination lock
ZK 1947 La Gard C

Knob
ZK LG 2085



810329.01

OPTION AGAINST SURCHARGE

Electronic lock -
Gator 8000 + DF v. 01

2 locks
1 DF keypad
Gator Signal Box
Gator Power Adapter
Bolt sensor
Power supply



810354.01

OPTION AGAINST SURCHARGE

Electronic lock -
Paxos Advance set 3+5 v. 01

2 locks
1 DIAL housing



810355.01


OPTION AGAINST SURCHARGE

Electronic lock -
Twinlock C800 Business LS 2.1 VdS 3

1 x FlatControl Business LS lock keypad
2 x INSYS Lock 800 LS lock
1 TwinConnect - central power connection
1 TwinXT II
1 12 V power supply 5 m

Preparation for alarm system

save4ever VI series has standard holes that enable the installation of alarm system components.

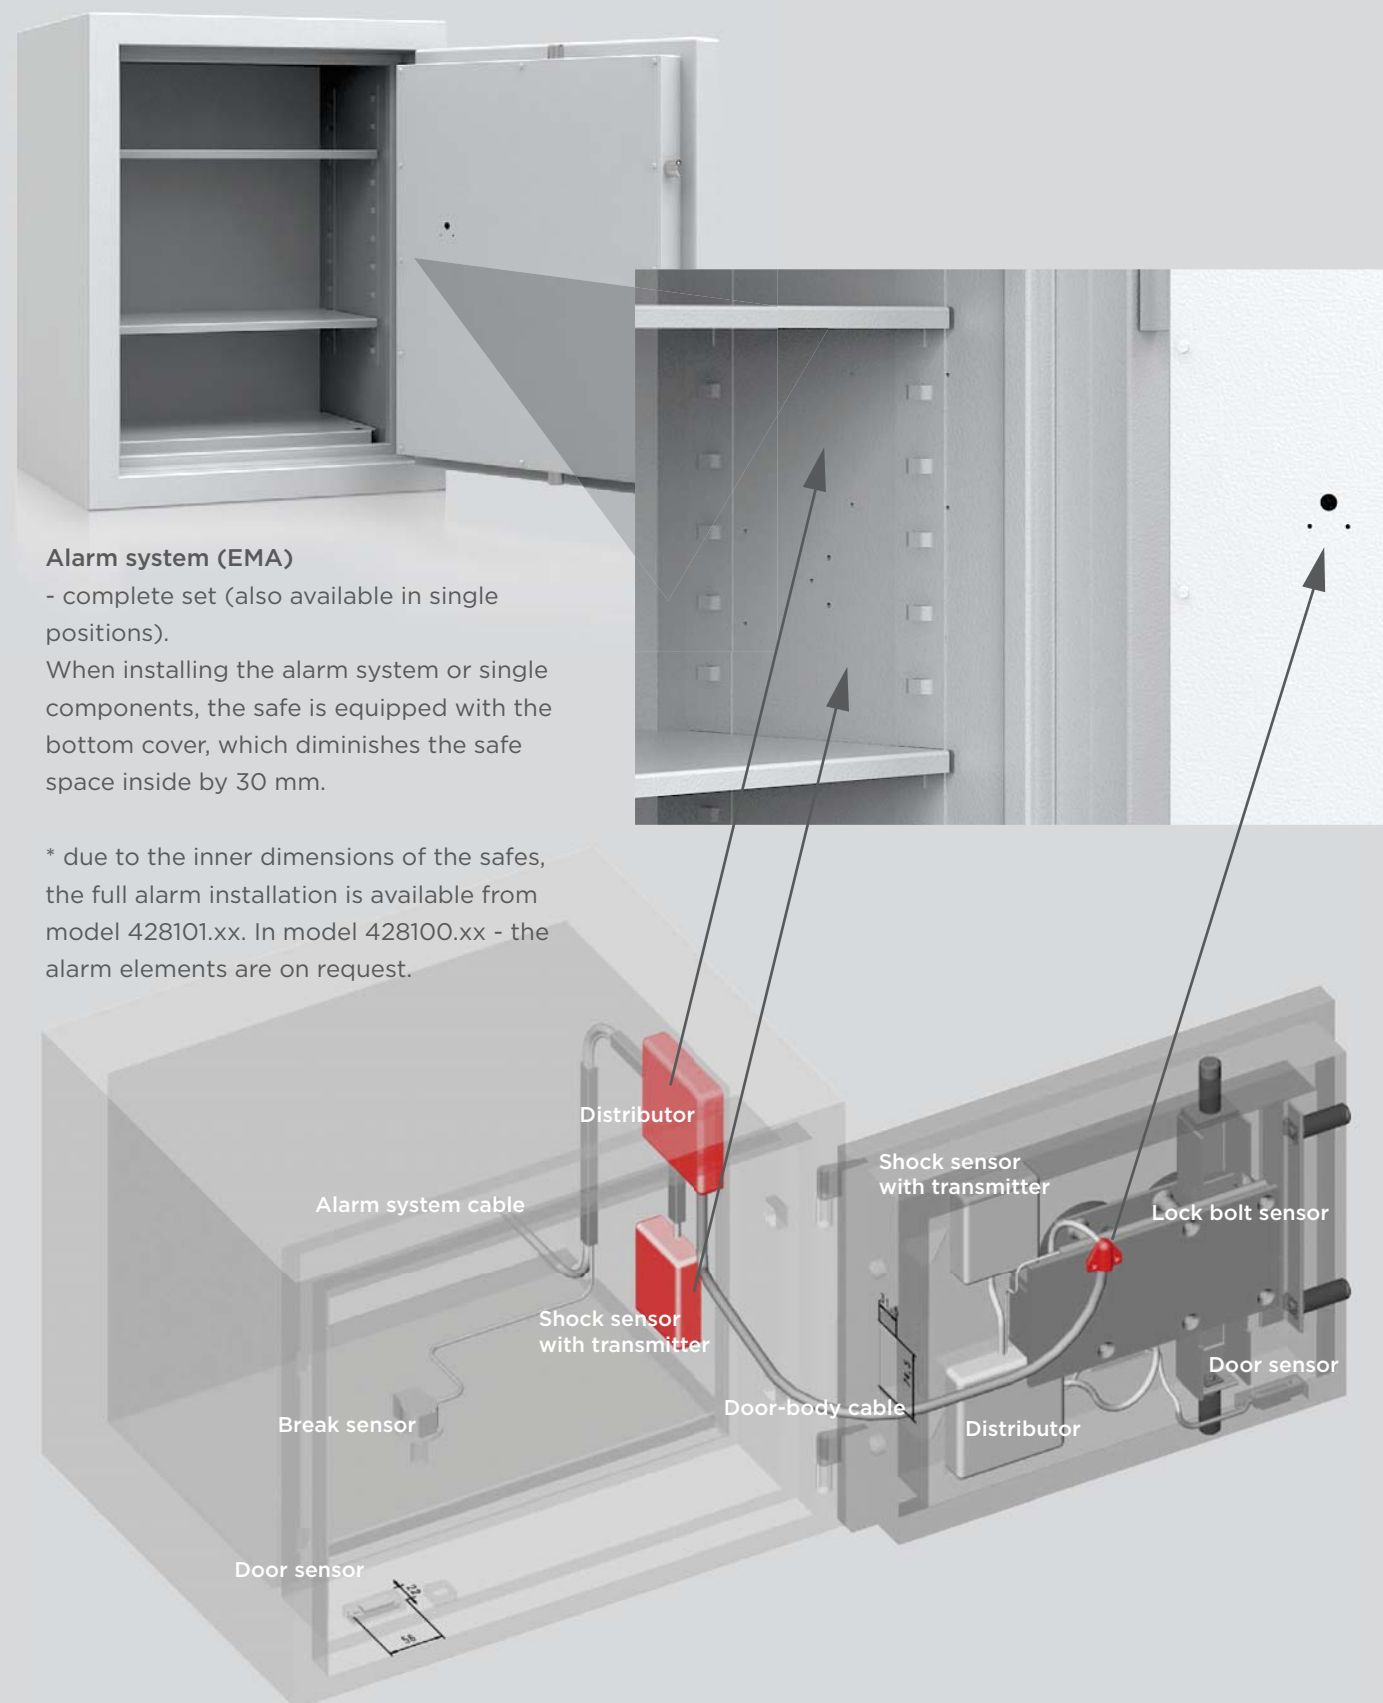

Alarm system (EMA)

- complete set (also available in single positions).

When installing the alarm system or single components, the safe is equipped with the bottom cover, which diminishes the safe space inside by 30 mm.

* due to the inner dimensions of the safes, the full alarm installation is available from model 428101.xx. In model 428100.xx - the alarm elements are on request.

Fire resistance of class VI safes

The real and functional fire resistance of safes is one that is confirmed by **certificates and appropriate tests**.

Fire resistance is the ability of safes to meet certain requirements during a fire.

The measure of the fire resistance of safes is the time expressed in minutes, in a simplified way illustrating how long a given safe can protect its contents from extremely severe conditions during a fire and fire action.

The light fire resistance defined by the LFS 30 class provides the stored property with short-term fire protection of 30 minutes.

Norm EN 15659:2019 implies heating the safe together with furnace according to temperature curve up to 840°C, and measuring the temperature in critical parts of the safe inside when it is heated up.

Certification label permanently fixed to the safe is a **guarantee for properly conducted test in specialized certification institutes**.



Acc. to
EN 15659:2019
norm

Fire seal

Foam seal



Model save4ever VI



Security level: Class VI
according to EN 1143-1:2019
Fire rating: Fire-protected safes
according to EN 15659:2019 LFS 30 P

Suitable for the storage of:

- valuables
- documents

Description

Series **save4ever VI** - safes with ECB•S certificate for storage of valuables.
Double protective mechanism: additional glass plate, which triggers bolting protection against the burglary attempt.

Body: multi-walled body
Door: multi -walled door construction with stainless steel handle for easy door opening
Locking: 2-way locking bolt system - incl. overlapping profile on the hinge side.

Standard option

Lock: 2 high security key locks III class VdS III - class C (each lock with 2 keys)
Boltwork handle: handle, protruding 79 mm
Hinges: external
Door opening angle: 180°
Mounting holes: 1 hole in the bottom, 1 blind hole in the back wall up to 1/3 height (assembly set for 1 hole as standard)
Additional equipment: each model prepared for alarm installation
Colour: RAL 9005, RAL 7035



Model save4ever VI

Art. No.	Model	Outer dimensions*			Inner dimensions			Door light		Anchoring		Weight	Shelves	Volume	Hooks
		Height mm	Width mm	Depth mm	Height mm	Width mm	Depth mm	Height mm	Width mm	Bottom number	Backwall number	Kg	Number	Liters	Number
428100.00	save4ever VI	790	660	620	550	410	305	544	386	1	1 **	740	1	69	5 ***
428101.00	save4ever VI	840	690	620	600	440	305	594	416	1	1 **	810	1	81	5 ***
428102.00	save4ever VI	990	690	620	750	440	305	744	416	1	1 **	930	1	101	5 ***
428103.00	save4ever VI	1190	690	620	950	440	305	944	416	1	1 **	1090	2	127	5 ***
428104.00	save4ever VI	1340	690	620	1100	440	305	1094	416	1	1 **	1220	2	148	5 ***
428105.00	save4ever VI	1490	690	620	1250	440	305	1244	416	1	1 **	1340	3	168	5 ***

* excluding hinges, handles and fittings ** not drilled *** hook strip for self assembly




Body: multi-walled body



Door: multi -walled door construction with stainless steel handle for easy door opening

Closure options

Option without additional charge



810137.00
Key lock
class C/III
2 lower parts
of the key
+ 1 upper part




810205.01 / 820203.00
Mechanical combination
lock
ZK 1947 La Gard C
Knob
ZK LG 2085


Options available against surcharge



810329.01
Electronic lock
Gator 8000 + DF v. 01
2 locks
1 DF keypad
2 x Gator Signal Box
Gator Power Adapter
Bolt sensor
Power supply




810354.01
Electronic lock
Paxos Advance
set 3+5 v. 01
2 locks
1 DIAL housing



810355.01
Electronic lock
Twinlock C800
Business LS 2.1 VdS 3
1 x FlatControl Business LS lock keypad
2 x INSYS Lock 800 LS lock
1 TwinConnect - central power connection
1 TwinXT II
1 12 V power supply 5 m

Accessories available against surcharge

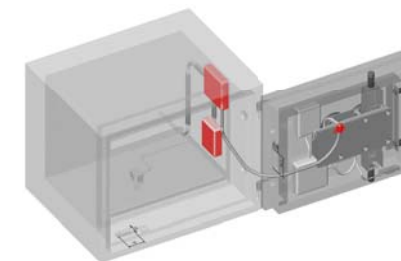

Alarm system (EMA) - complete set
(also available in single positions).

When installing the alarm system or single components, the safe is equipped with the bottom cover, which diminishes the safe space inside by 30 mm.

* due to the inner dimensions of the safes, the full alarm installation is available from model 428101.xx. In model 428100.xx - the alarm elements are on request.



All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.

High security safes

High security safes

HINGES WITH DECORATIVE
ALUMINIUM PLUGS

VESTA DOOR HANDLE
AND ROSETTES
IN THE STANDARD

NEW BOLTWORK
AND BOLTS



According to
EN 15659:2019
norm

Security level: Class VII according to EN 1143-1:2019
Fire rating: Fire-protected safes according
to EN 15659:2019 LFS 30 P

Suitable for the storage of

-  **valuables**
-  **documents**

Description

Series **save4ever VII** - safes with ECB•S certificate for storage of valuables.

Double protective mechanism: additional glass plate, which triggers bolting protection against the burglary attempt.

Body: multi-walled body

Door: multi-walled door construction with stainless steel handle for easy door opening

Locking: 2-way locking bolt system - incl. overlapping profile on the hinge side.

Standard option

Lock: 2 high security key locks III class VdS III - class C (each lock with 2 keys)

Boltwork handle: handle, protruding 79 mm

Hinges: external

Door opening angle: 180°

Mounting holes: 1 hole in the bottom, 1 blind hole in the back wall up to 1/3 height (assembly set for 1 hole as standard)

Additional equipment: each model prepared for alarm installation

Colour: RAL 9005, RAL 7035

save4ever VII





key lock



429100.21 / 429100.01



429101.21 / 429101.01



429102.21 / 429102.01

Outer dimensions HxWxD (mm)	830 x 700 x 660	880 x 730 x 660	1030 x 730 x 660
Inner dimensions HxWxD (mm)	550 x 410 x 305	600 x 440 x 305	750 x 440 x 305
Weight	920 kg	1000 kg	1150 kg
Shelves number (pcs.):	1	1	1
Hooks on the hook bar (pcs.) *	5	5	5
Volume (l.)	69	81	101
Lock type	Double key locks (each with 2 keys)		
Paint	RAL 9005 / RAL 7035		

* hook strip for self assembly



key lock



429103.21 / 429103.01



429104.21 / 429104.01



429105.21 / 429105.01

Outer dimensions HxWxD (mm)	1230 x 730 x 660	1380 x 730 x 660	1530 x 730 x 660
Inner dimensions HxWxD (mm)	950 x 440 x 305	1100 x 440 x 305	1250 x 440 x 305
Weight	1350 kg	1490 kg	1640 kg
Shelves number (pcs.):	2	2	3
Hooks on the hook bar (pcs.) *	5	5	5
Volume (l.)	127	148	168
Lock type	Double key locks (each with 2 keys)		
Paint	RAL 9005 / RAL 7035		

* hook strip for self assembly

** available options of changing the lock



810137.00

OPTION WITHOUT ADDITIONAL CHARGE

Key lock
class C/III with 2 keys
(1 standard, 1 detachable)



810205.01 / 820203.00

OPTION WITHOUT ADDITIONAL CHARGE

Mechanical combination lock
ZK 1947 La Gard C

Knob
ZK LG 2085



810329.01

OPTION AGAINST SURCHARGE

Electronic lock -
Gator 8000 + DF v. 01

2 locks
1 DF keypad
Gator Signal Box
Gator Power Adapter
Bolt sensor
Power supply




810354.01

OPTION AGAINST SURCHARGE

Electronic lock -
Paxos Advance set 3+5 v. 01

2 locks
1 DIAL housing

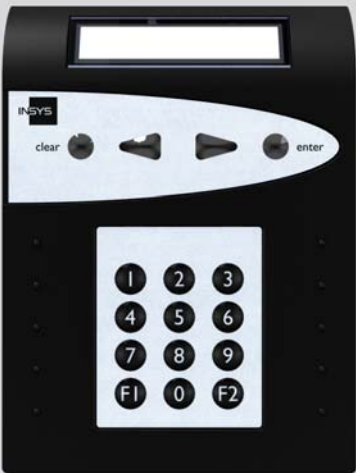

810355.01


OPTION AGAINST SURCHARGE

Electronic lock -
Twinlock C800 Business LS 2.1 VdS 3

1 x FlatControl Business LS lock keypad
2 x INSYS Lock 800 LS lock
1 TwinConnect - central power connection
1 TwinXT II
1 12 V power supply 5 m

Preparation for alarm system

save4ever VII series has standard holes that enable the installation of alarm system components.

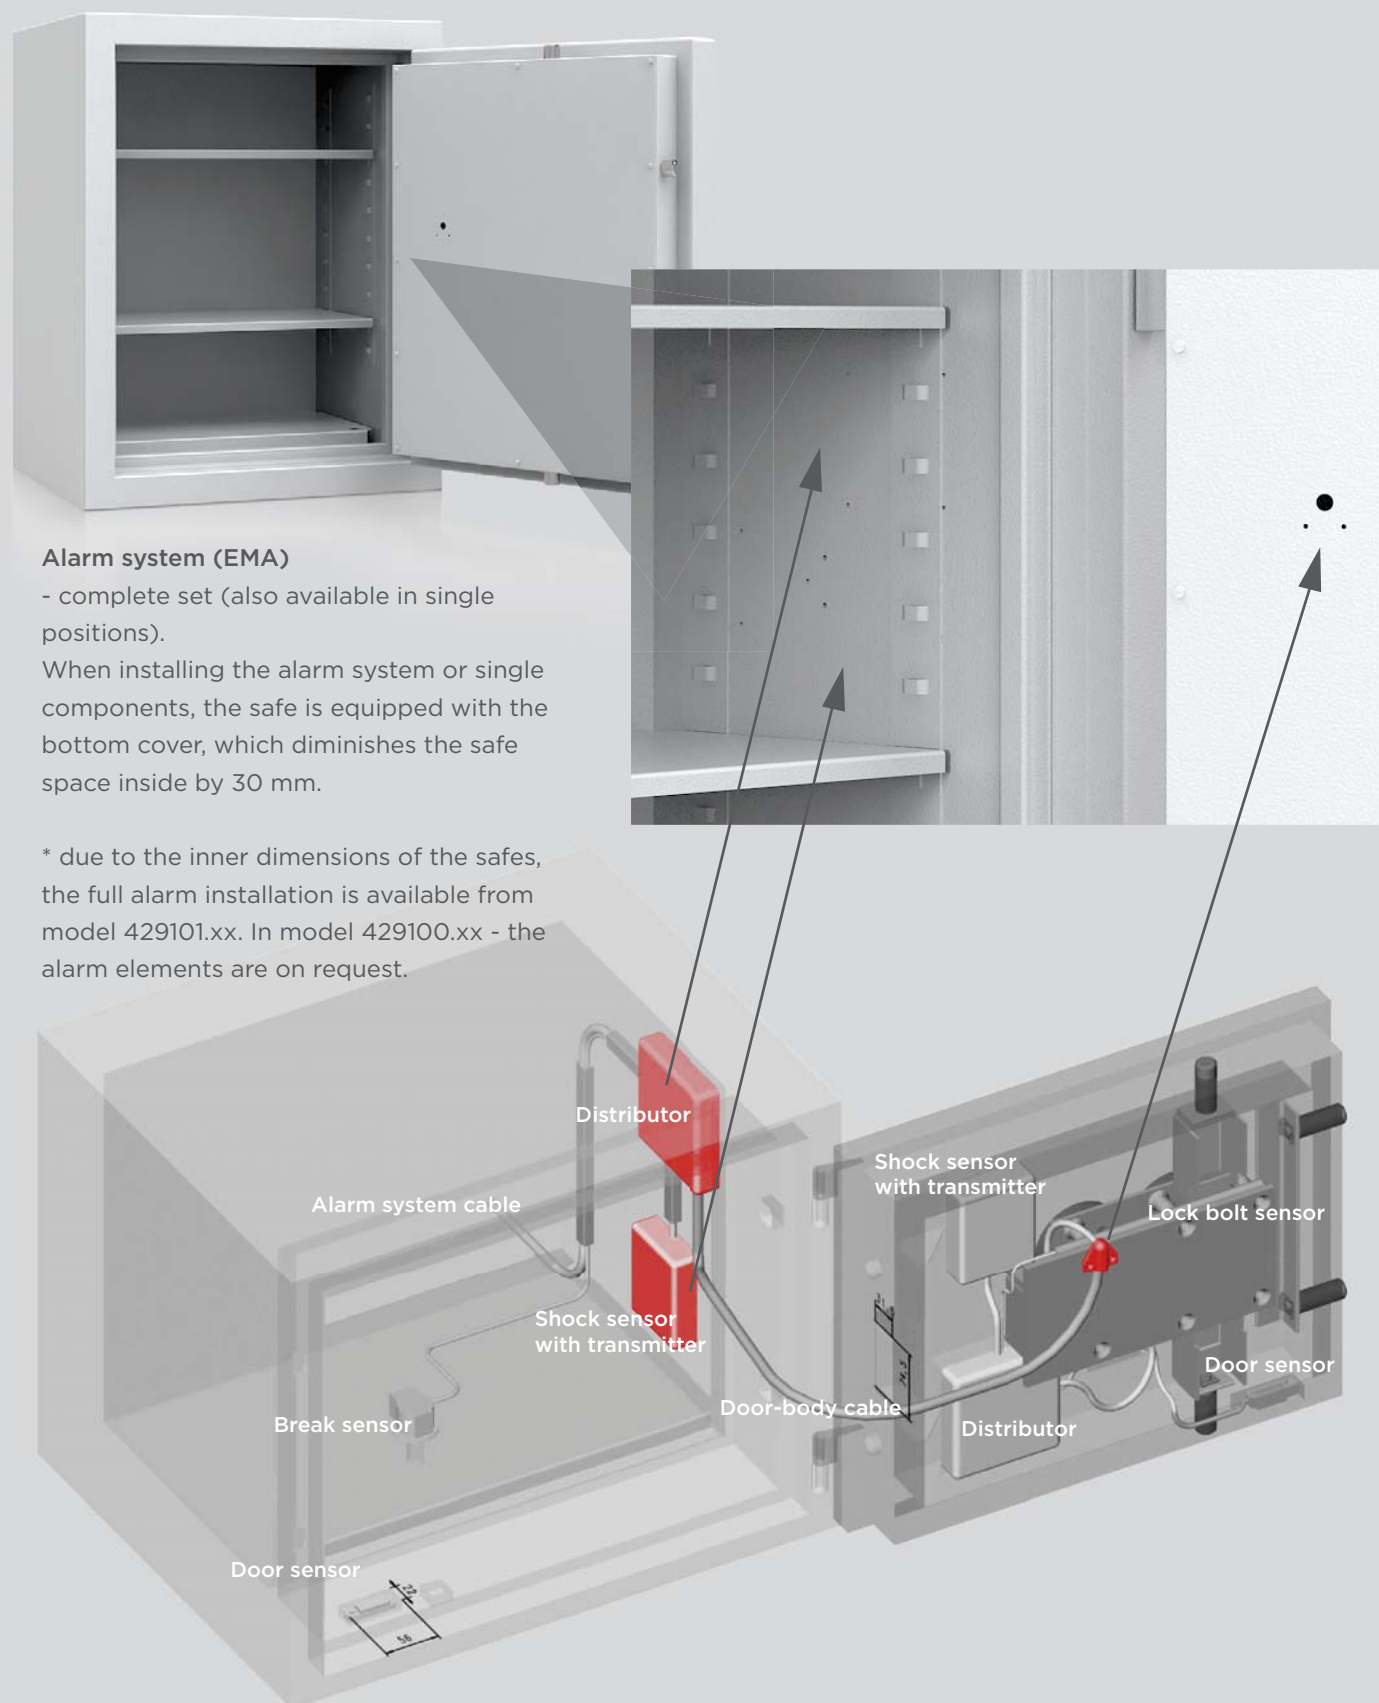

Alarm system (EMA)

- complete set (also available in single positions).

When installing the alarm system or single components, the safe is equipped with the bottom cover, which diminishes the safe space inside by 30 mm.

* due to the inner dimensions of the safes, the full alarm installation is available from model 429101.xx. In model 429100.xx - the alarm elements are on request.

Fire resistance of class VII safes

The real and functional fire resistance of safes is one that is confirmed by **certificates and appropriate tests**.

Fire resistance is the ability of safes to meet certain requirements during a fire.

The measure of the fire resistance of safes is the time expressed in minutes, in a simplified way illustrating how long a given safe can protect its contents from extremely severe conditions during a fire and fire action.

The light fire resistance defined by the LFS 30 class provides the stored property with short-term fire protection of 30 minutes.

Norm EN 15659:2019 implies heating the safe together with furnace according to temperature curve up to 840°C, and measuring the temperature in critical parts of the safe inside when it is heated up.

Certification label permanently fixed to the safe is a **guarantee for properly conducted test in specialized certification institutes**.



Acc. to
EN 15659:2019
norm



Model
save4ever VII



Security level: Class VII
according to EN 1143-1:2019
Fire rating: Fire-protected safes
according to EN 15659:2019 LFS 30 P

Suitable for the storage of:

- valuables**
- documents**

Description

Series **save4ever VII** - safes with ECB•S certificate for storage of valuables.
Double protective mechanism: additional glass plate, which triggers bolting protection against the burglary attempt.

Body: multi-walled body
Door: multi -walled door construction with stainless steel handle for easy door opening
Locking: 2-way locking bolt system - incl. overlapping profile on the hinge side

Standard option

Lock: 2 high security key locks III class VdS III - class C (each lock with 2 keys)
Boltwork handle: handle, protruding 79 mm
Hinges: external
Door opening angle: 180°
Mounting holes: 1 hole in the bottom, 1 blind hole in the back wall up to 1/3 height (assembly set for 1 hole as standard)
Additional equipment: each model prepared for alarm installation
Colour: RAL 9005, RAL 7035



Model
save4ever VII

Art. No.	Model	Outer dimensions*			Inner dimensions			Door light		Anchoring		Weight	Shelves	Volume	Hooks
		Height mm	Width mm	Depth mm	Height mm	Width mm	Depth mm	Height mm	Width mm	Bottom number	Backwall number	Kg	Number	Liters	Number
429100.00	save4ever VII	830	700	660	550	410	305	554	386	1	1 **	920	1	69	5 ***
429101.00	save4ever VII	880	730	660	600	440	305	604	416	1	1 **	1000	1	81	5 ***
429102.00	save4ever VII	1030	730	660	750	440	305	754	416	1	1 **	1150	1	101	5 ***
429103.00	save4ever VII	1230	730	660	950	440	305	954	416	1	1 **	1350	2	127	5 ***
429104.00	save4ever VII	1380	730	660	1100	440	305	1104	416	1	1 **	1490	2	148	5 ***
429105.00	save4ever VII	1530	730	660	1250	440	305	1254	416	1	1 **	1640	3	168	5 ***

* excluding hinges, handles and fittings ** not drilled *** hook strip for self assembly




Body: multi-walled body



Door: multi -walled door construction with stainless steel handle for easy door opening

Closure options

Option without additional charge



810137.00
Key lock
class C/III

2 lower parts
of the key
+ 1 upper part



810205.01 / 820203.00
Mechanical combination
lock
ZK 1947 La Gard C

Knob
ZK LG 2085

Options available against surcharge




810329.01
Electronic lock
Gator 8000 + DF v. 01

2 locks
1 DF keypad
2 x Gator Signal Box
Gator Power Adapter
Bolt sensor
Power supply



810354.01
Electronic lock
Paxos Advance
set 3+5 v. 01


2 locks
1 DIAL housing



810355.01
Electronic lock
Twinlock C800
Business LS 2.1 VdS 3

1 x FlatControl Business LS lock keypad
2 x INSYS Lock 800 LS lock
1 TwinConnect - central power connection
1 TwinXT II
1 12 V power supply 5 m

Accessories available against surcharge

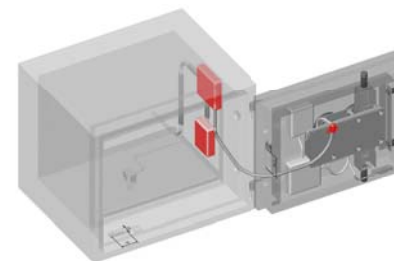

Alarm system (EMA) - complete set
(also available in single positions).

When installing the alarm system or single components, the safe is equipped with the bottom cover, which diminishes the safe space inside by 30 mm.

* due to the inner dimensions of the safes, the full alarm installation is available from model 429101.xx. In model 429100.xx - the alarm elements are on request.



All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.

High security safes

High security safes