INTER SICHERHEITS SERVICE

Model
Leverkusen Office





Security level: Class S2 according to EN 14450
Security level: B according to VDMA 24992 - Conditions May'95
Fire rating: Fire-protected safes according to EN 1047-1 S 60 P

The cabinet has been approved in accordance with EN 1047-1 in fire class 60 P. The certification was awarded by VdS they have fire and impact tests.

Suitable for the storage of:
- **office documents, office equipment**
- **gun (see additional accessories)**

Description
Series Leverkusen Office - the cabinets with one-hour protection from fire S 60 P.

Body: double-walled body (50 mm thick)
Door: multi-walled door construction (95 mm thick)
Locking: 4-way locking bolt system - incl. fix bolts on the hinge side

Standard option
Lock: high security key lock I class with two keys (120 mm)
Boltwork handle: handle, protruding 60 mm
Hinges: external
Door opening angle: 180°
Mounting holes: 2 holes in the floor
Colour: RAL 7035 (light grey)



Model
Leverkusen Office

Art. No.	Model	Outer dimensions*			Inner dimensions			Door light		Anchoring		Weight	Shelves	Files	Volume
		Height mm	Width mm	Depth mm	Height mm	Width mm	Depth mm	Height mm	Width mm	Bottom number	Backwall number	Kg	Number	Number	Liters
43200	Leverkusen Office **	901	975	459	800	863	303	785	845	2	-	320	1	24	209
43201	Leverkusen Office **	901	975	559	800	863	403	785	845	2	-	355	1	24	278
43202	Leverkusen Office **	901	1128	459	800	1016	303	785	998	2	-	363	1	29	246
43204	Leverkusen Office **	901	1282	459	800	1170	303	785	1152	2	-	399	1	33	284
43207	Leverkusen Office **	1045	1128	506	944	1016	350	929	998	2	-	414	2	35	336
43208	Leverkusen Office **	1045	1282	506	944	1170	350	929	1152	2	-	455	2	39	387
43209	Leverkusen Office **	1189	975	459	1088	863	303	1073	845	2	-	390	2	33	285
43211	Leverkusen Office **	1189	1128	459	1088	1016	303	1073	998	2	-	434	2	39	335
43213	Leverkusen Office **	1189	1282	459	1088	1170	303	1073	1152	2	-	477	2	45	386
43214	Leverkusen Office **	1189	1282	559	1088	1170	403	1073	1152	2	-	516	2	45	513

* excluding hinges, handles and fittings ** 2-door



Body: double-walled body 50 mm thick



Door: multi-walled door construction 95 mm thick


Closure options

Standard option



Key lock

Options available against surcharge

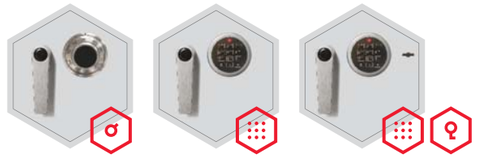

Mechanical code lock

Electronic lock

Electronic lock with mechanical emergency (Excl. 43200-01, 43206, 43209-43210)

Accessories available against surcharge



Inner safe

Extensible file frame

Extendable shelf

Extendable drawer for individual arragement

Shelf for hanging files

RAL 7035

RAL 9006

RAL 7024

All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.

Fireproof Safes for Paper Documents